



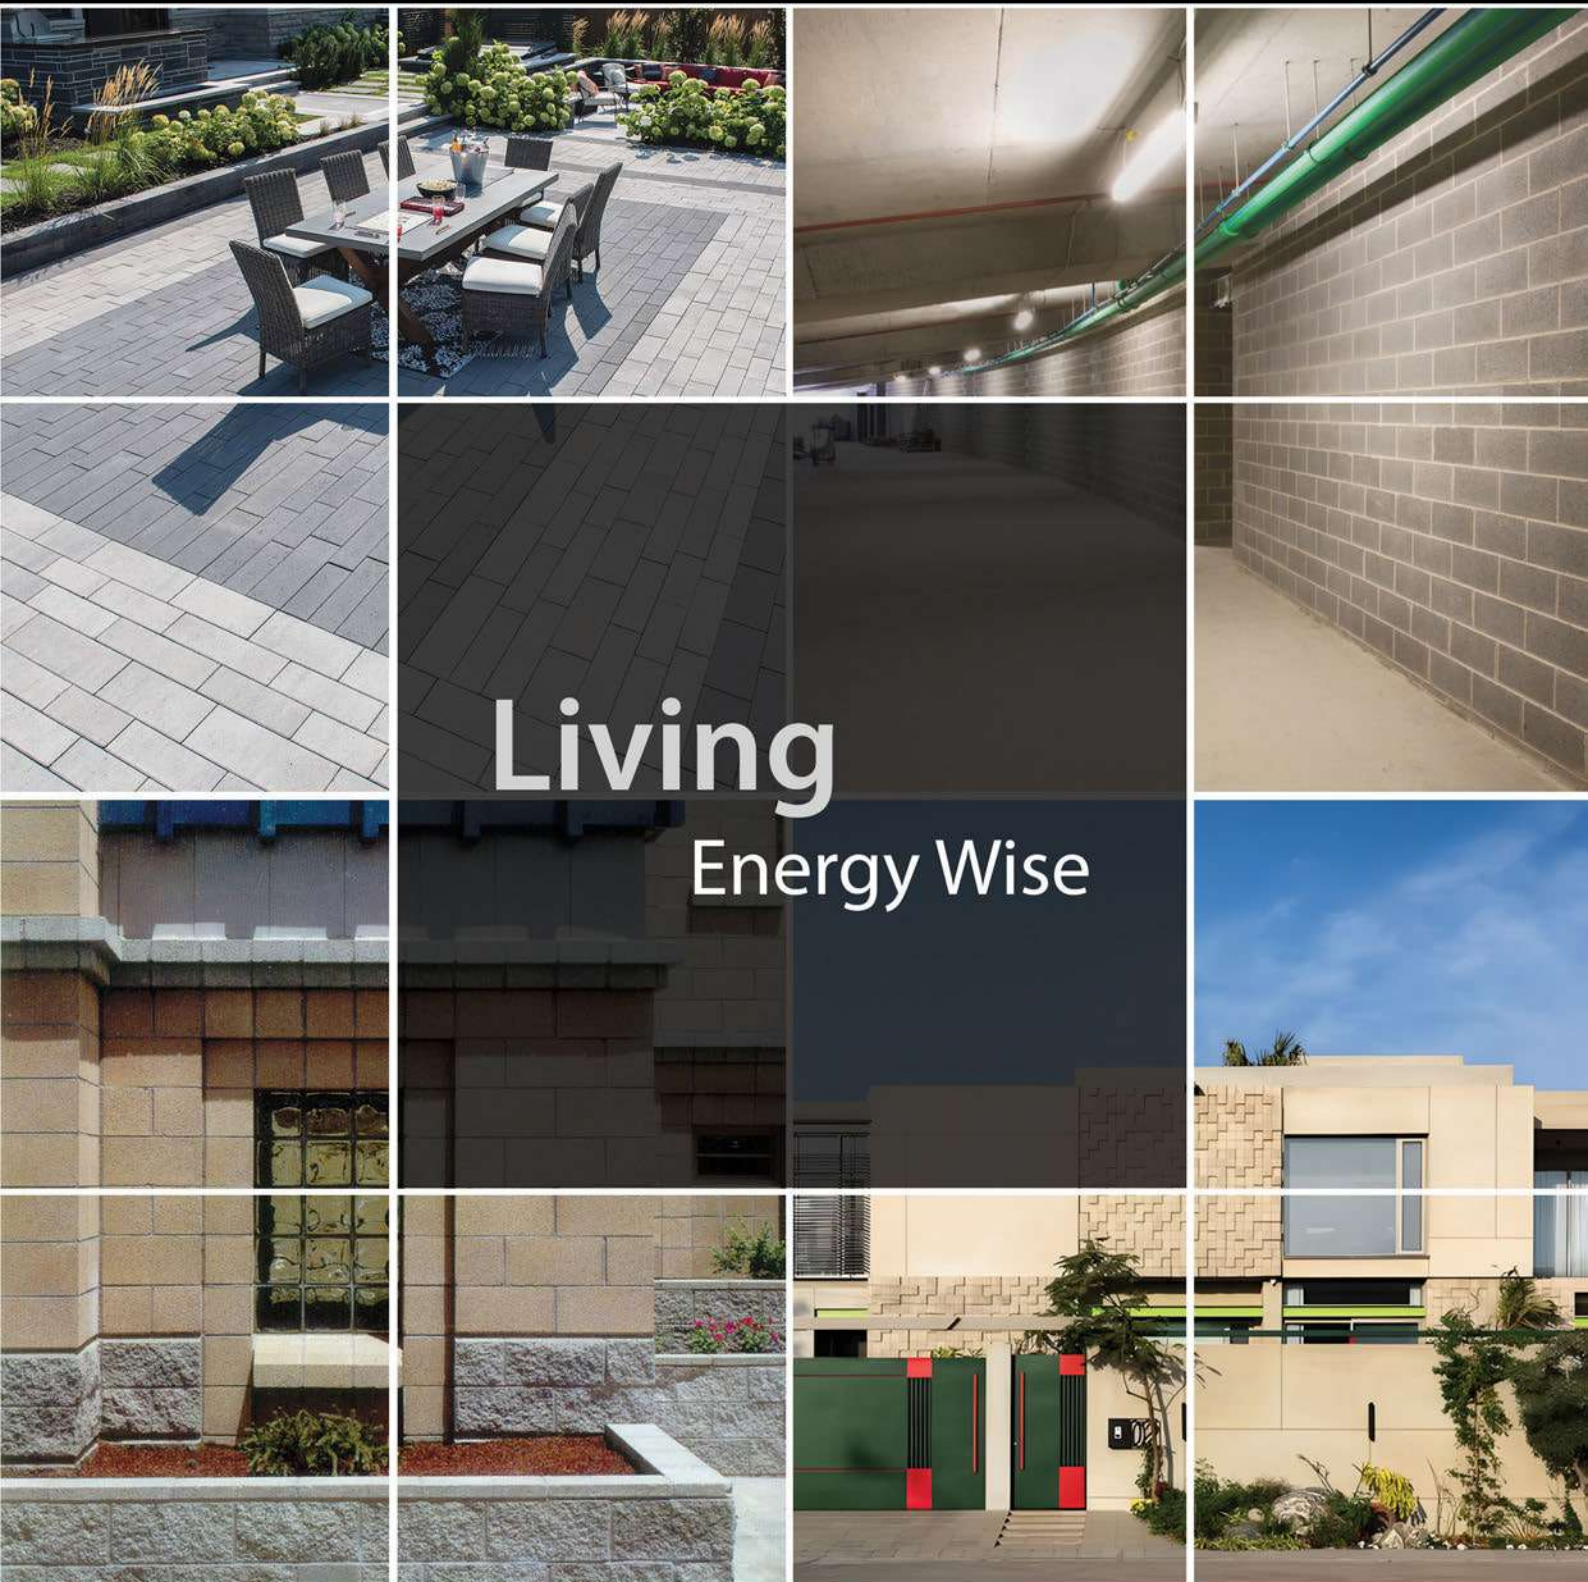

Living Energy Wise

envicrete
the perfect way to build


www.envicrete.com

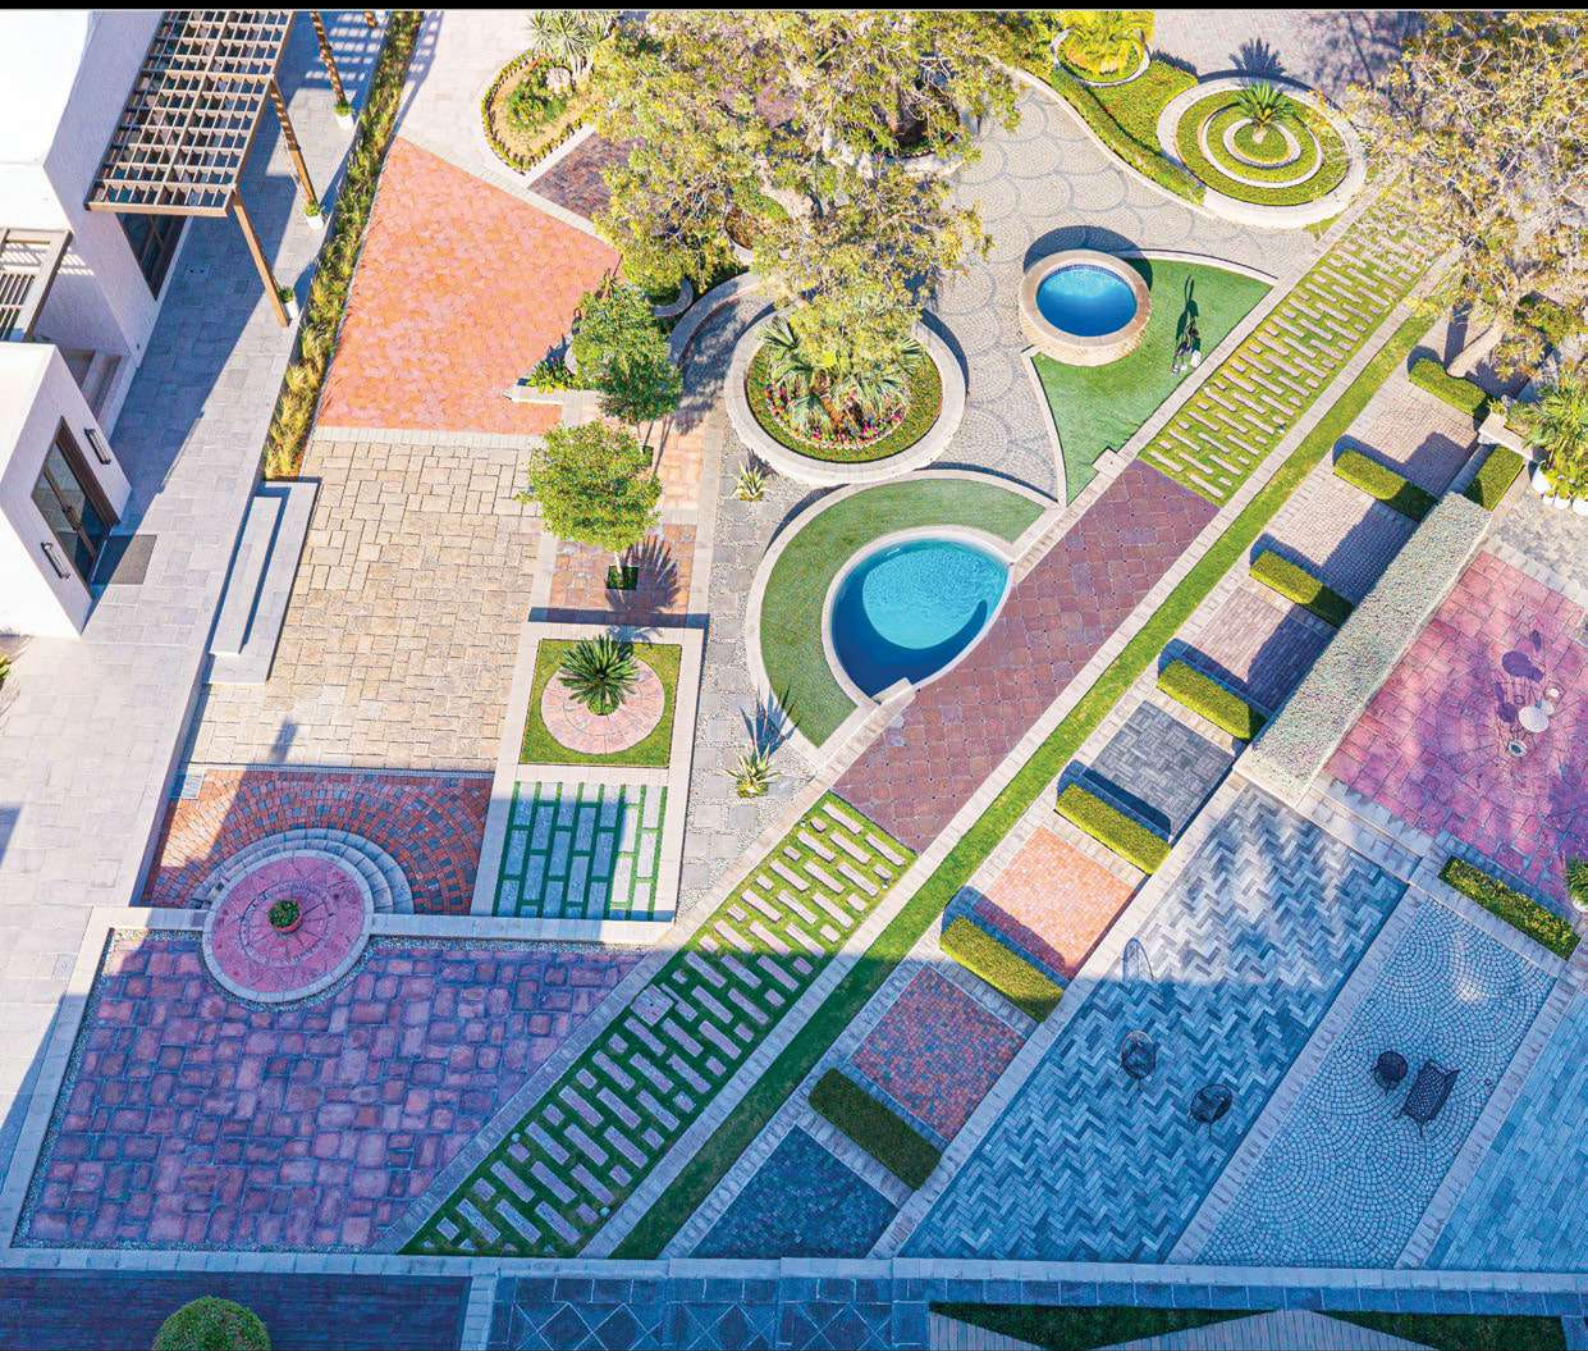

envicrete
the perfect way to build

Time Tested Performance

for over 40 years

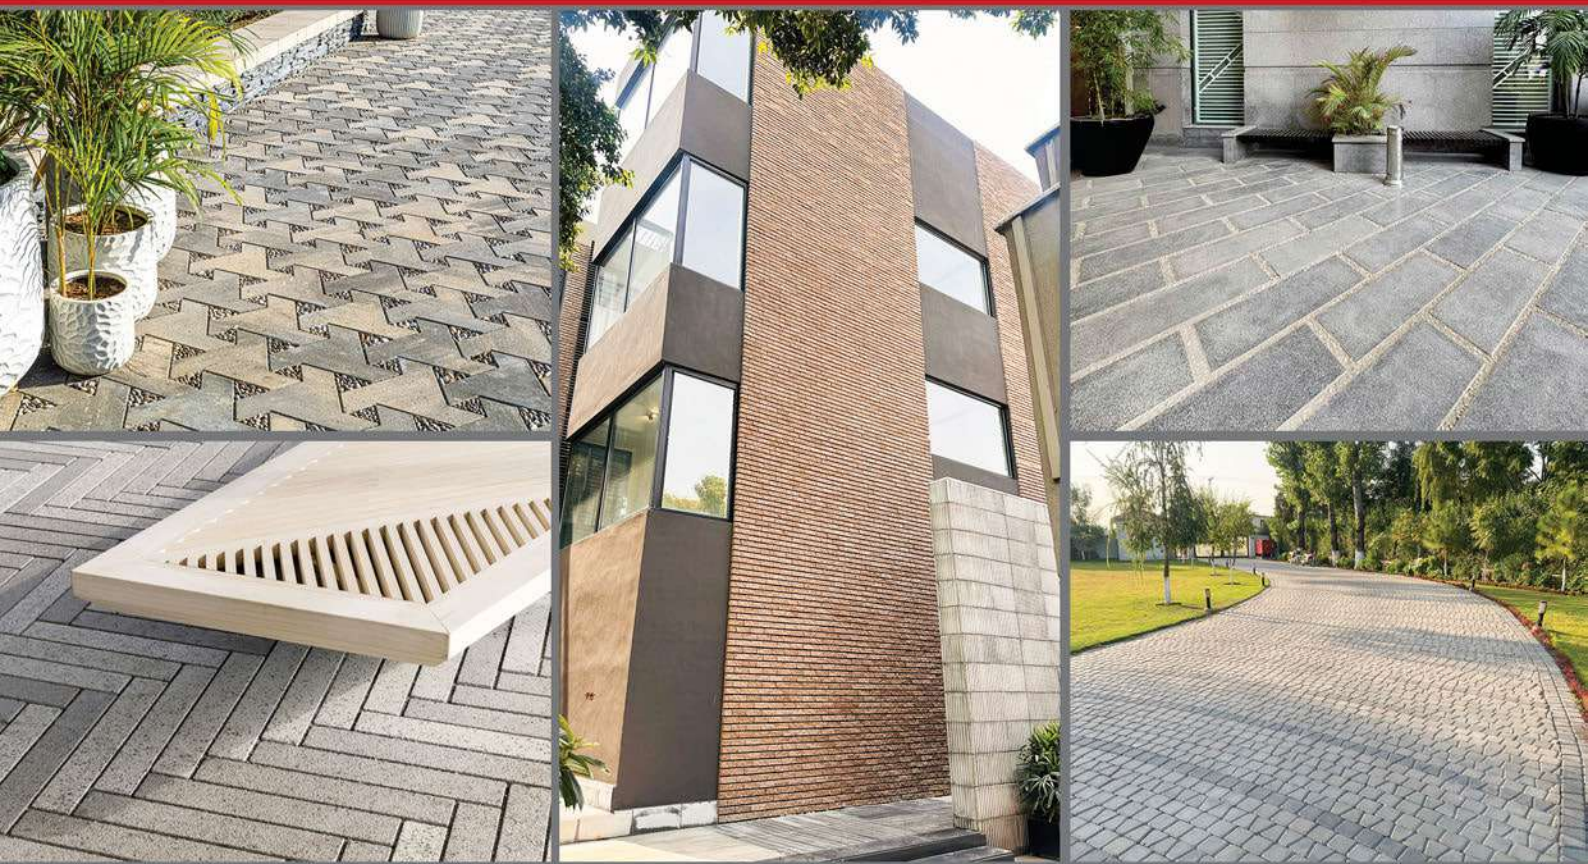

envicrete

www.envicrete.com

COMPANY PROFILE

For over Four decades, **envicrete** a name synonymous with quality, integrity and core excellence has carved its position as Pakistan's leading manufacturer of premium building materials. Throughout this journey, we have operated cohesively as a robust team, crafting an enduring legacy of architectural excellence that holds a distinctive footprint in the market.

Driven by a potent desire to succeed in catering to the diverse needs of our customers, we continuously strive to present an extensive range of products manufactured using integration of cutting-edge technology that is complimented by our strategically located production facilities and a country wide distribution network. This customer centric approach amplifies our pledge to offer a wide range of choices showcasing our unwavering dedication to delivering solutions that perfectly align with the preferences and demands of each customer.

With a vision to lead as the Premier building materials manufacturer and supplier, and striving consistently to deliver the finest quality building materials for a perfect way to build. Our mission is to be the benchmark through which standards are set in the ever-evolving landscape of the building materials industry; with the ultimate goal to shape spaces, empower creativity and leave an indelible mark in the world of construction.

Today, **envicrete** stands as a market leader and the preferred choice of leading architects, engineers, consultants, and discerning specifiers across Pakistan. Our products have been extensively used in residential, commercial, industrial, and municipal projects nationwide.

Based on a customer centric approach **envicrete's** core values are founded on Quality, Excellence, Sustainability & Innovation. We are dedicated to delivering top-notch quality, pioneering eco-friendly solutions, and placing our customers at the heart of our operations fostering trust, transparency, and exceptional service in every interaction.

For sure **envicrete** products are the perfect way to build!

PRODUCT RANGE

COMMERCIAL HARD LANDSCAPING

HEAVY TRAFFIC PAVEMENT

HOMES & GARDENS COLLECTION

TABLE OF CONTENTS

CONTENT	PAGE NO
PAVERS / PAVING BLOCKS	1 TO 34
▣ Arctic	1 - 2
▣ Promenade	3 - 4
▣ Slabs	5 - 6
▣ Ashlar	7 - 8
▣ Tri Paver	9 - 10
▣ Old Town	11 - 12
▣ Autumn Leaf	13 - 14
▣ Roman Classic	15 - 16
▣ Classico	17 - 18
▣ Boston 20x20	19 - 20
▣ Boston 12x12 & 18x18	21 - 22
▣ Classic Square	23 - 24
▣ Fan Paver	25 - 26
▣ City	27 - 28
▣ Quadra	29 - 30
▣ Cobble	31 - 32
▣ Flat	33 - 34
BLOCKS	35 TO 44
▣ Hollow / Cellular	35 - 36
▣ Hollow Stone	37 - 38
▣ Solid Block	39 - 40
▣ Masonary Hollow Block / Standard Block	41 - 42
▣ Masonary Solid Block / Standard Block	43 - 44
CLADDING BLOCKS	45 TO 46
▣ Envistone	45 - 46
KERBSTONES & EDGING BLOCKS	47 TO 48
▣ Kerbstones & Edging	47 - 48
RETAINING WALL SYSTEMS	49 TO 50
▣ Keystone	49 - 50
LiteCrete	51 TO 52
▣ Light Weight Blocks	51 - 52
PreCast	53 TO 54
▣ Boundary Wall	53 - 54
Fast-Built Dry Construction System	55
▣ envicrete Boards	55



DESCRIPTION

Arctic Paver combines premium paving and exceptional durability with a refined modern finish making it an ideal choice for outdoor spaces. Engineered to withstand heavy traffic and diverse weather conditions, **Arctic Paver** maintains it's strength and structure year after year. The smooth, sleek surface offers a sophisticated look while ensuring long-lasting performance, delivering both beauty and resilience for pathways, patios, and landscapes.


Product	Sizes (mm)	Quantity Per Pallet
Arctic	598mm(l) x 198mm(w) x 60mm(t)	178 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Arora red, Granite, Onyx, Peppered granite, Verona.

DIMENSIONS AND SPECIFICATIONS

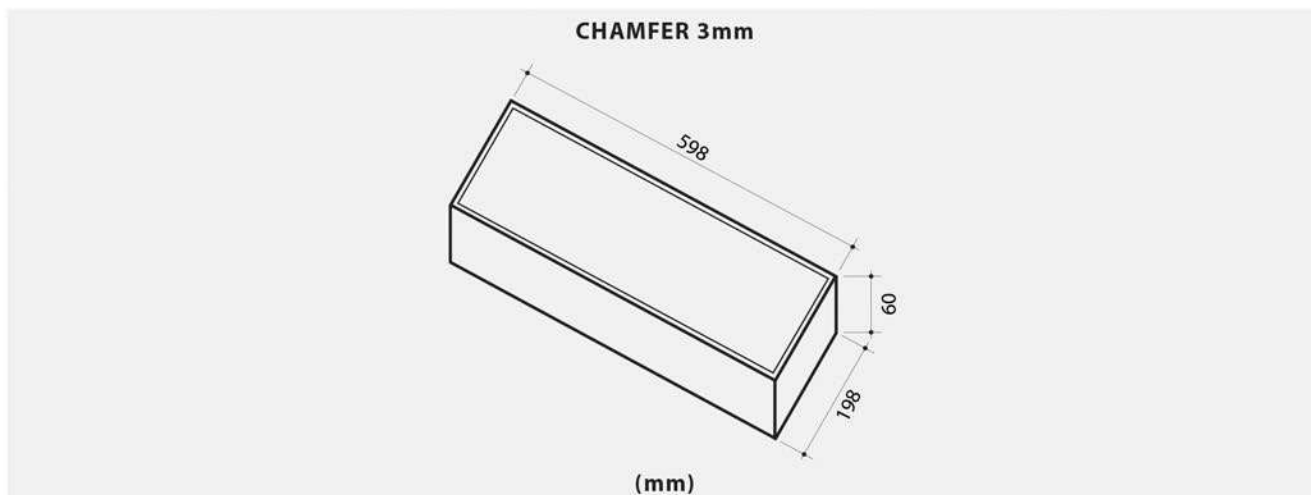

STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.



PROMENADE



DESCRIPTION

Promenade brings strength and style to your outdoor spaces with our high-performance paving. Designed for lasting durability, they resist wear & tear, being weather resistant they keep your pathways and patios looking flawless year after year. With a clean, modern finish that elevates any landscape, these pavers don't just perform, they impress, blending reliability with timeless elegance.


Product	Sizes (mm)	Quantity Per Pallet
Promenade	398mm(l) x 98mm(w) x 60mm(t)	162 SFT
	298mm(l) x 98mm(w) x 60mm(t)	

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Arora red, Granite, Oynx, Peppered granite, Verona.

DIMENSIONS AND SPECIFICATIONS

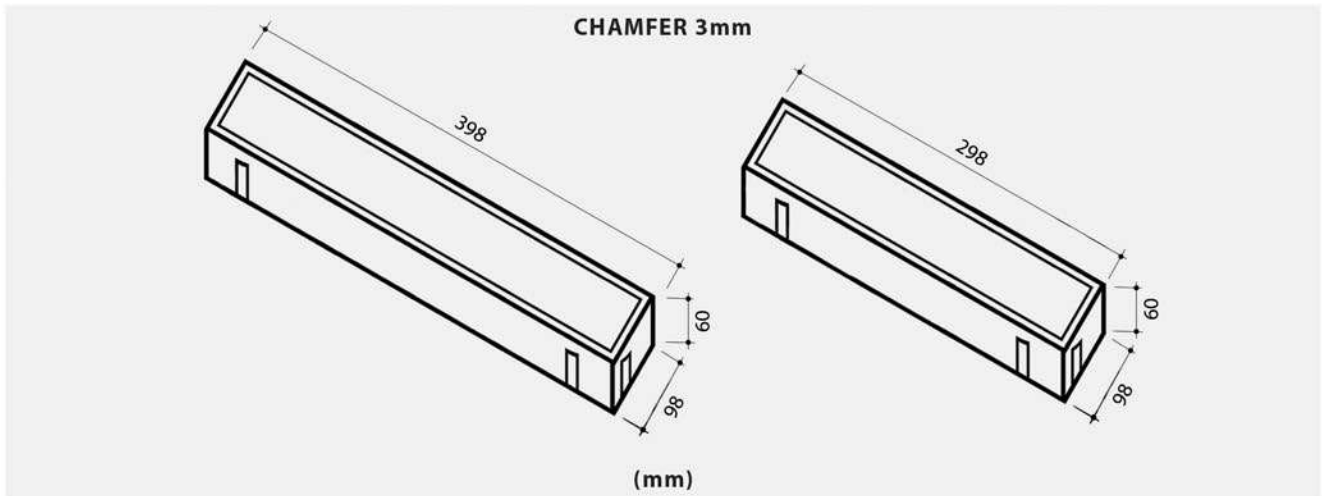

STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.



SLABS



DESCRIPTION

Our premium **Slabs** offer a sleek, durable, and modern paving solution for outdoor spaces. Designed with precision, these **slabs** feature a fine non-slip texture and elegant grey finish providing both safety and aesthetic appeal. Ideal for commercial landscapes, driveways, patios, and walkways, it ensures long-lasting performance and low maintenance. Their uniform size and clean joint lines create a refined look that complements any architectural style, making them the perfect choice for an elegant and functional flooring.


Product	Sizes (mm)	Quantity Per Pallet
Slabs	914mm(l) x 304mm(w) x 50mm(t)	120 SFT
	914mm(l) x 204mm(w) x 50mm(t)	120 SFT
	600mm(l) x 450mm(w) x 45mm(t)	120 SFT
	450mm(l) x 450mm(w) x 30mm(t)	120 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Arora red, Granite, Onyx black, Peppered granite, Verona.

DIMENSIONS AND SPECIFICATIONS

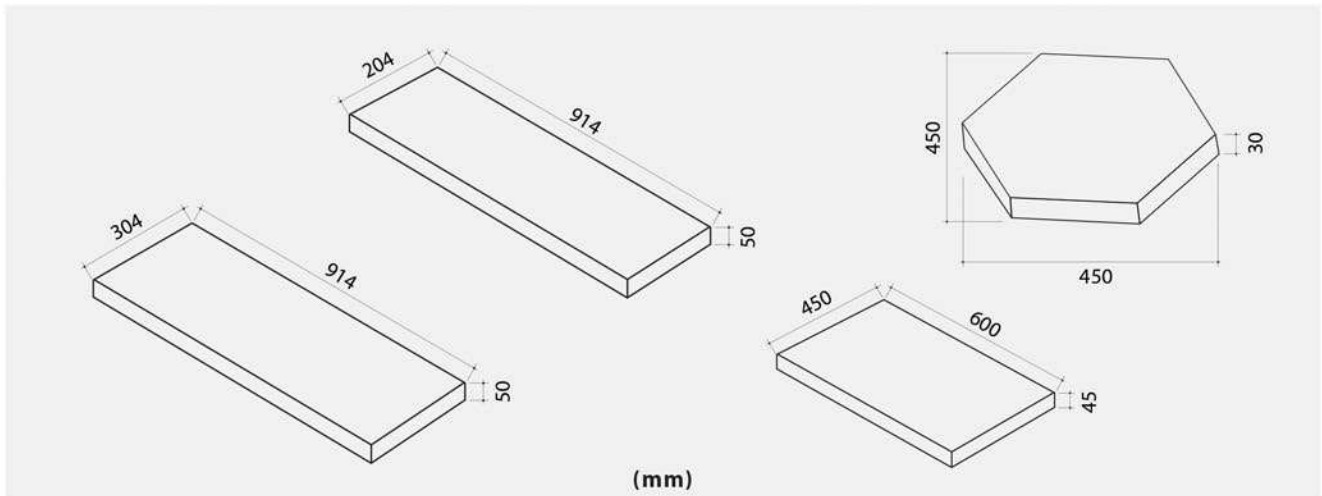

STRENGTH

Up to 3000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in Beach Grade recipes.



ASHLAR



DESCRIPTION

Ashlar Paver offers unmatched durability with a stylish touch, crafted to endure heavy use while retaining its timeless appeal. Available in four distinct sizes and a range of rich, natural colors, these pavers give you the freedom to create unique patterns with personalized designs that truly reflect changing seasonal patterns. Perfect for courtyards, driveways, and walkways, they blend strength with beauty, bringing long lasting elegance to any outdoor space.


Product	Sizes (mm)	Quantity Per Pallet
Ashlar	110mm(l) x 90mm(w) x 60mm(t)	122 SFT
	90mm(l) x 90mm(w) x 60mm(t)	
	80mm(l) x 90mm(w) x 60mm(t)	
	70mm(l) x 90mm(w) x 60mm(t)	

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Charcoal, Cinnabar, Tan & Russet.

DIMENSIONS AND SPECIFICATIONS

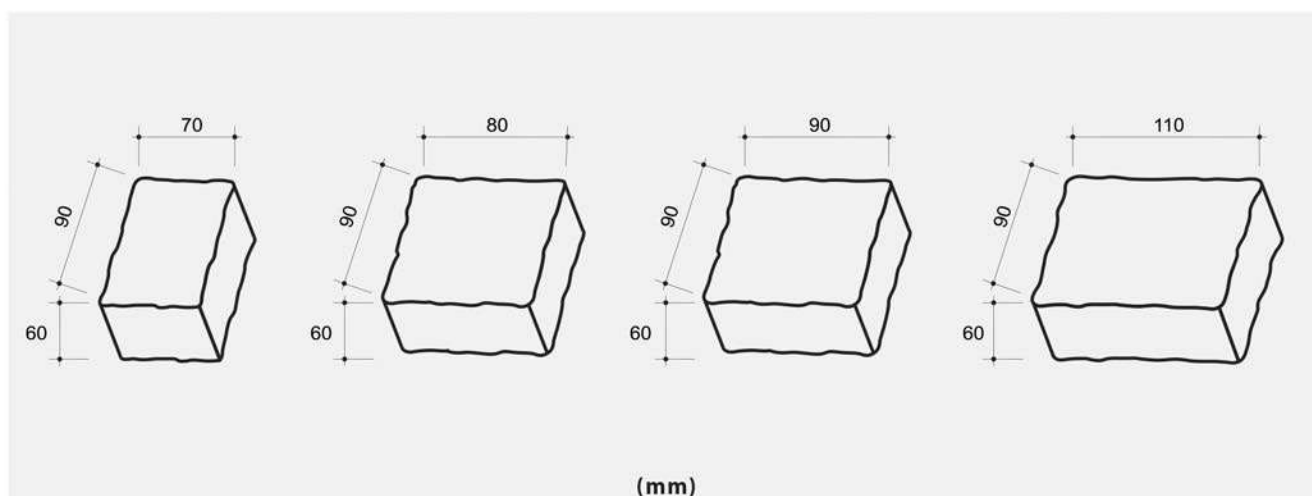

STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
 Driveways
 Landscaping
 Patios
 Residential streets
 Pedestrian Malls

All products are also available in
 Beach Grade recipes.



TRI PAVER



DESCRIPTION

Tri Paver is designed for unmatched durability and strength, featuring a unique interlocking shape that creates a solid bond across the floor. It's robust structure ensures long-lasting stability, even under heavy loads. With it's reliable performance and stylish finish, **Tri Paver** is the perfect choice for driveways, walkways, and outdoor spaces that demand both strength and elegance.


Product	Sizes (mm)	Quantity Per Pallet
Tri Paver	300mm x 300mm x 300mm 60mm(t)	78 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Dolphine Grey, Cinnabar

DIMENSIONS AND SPECIFICATIONS

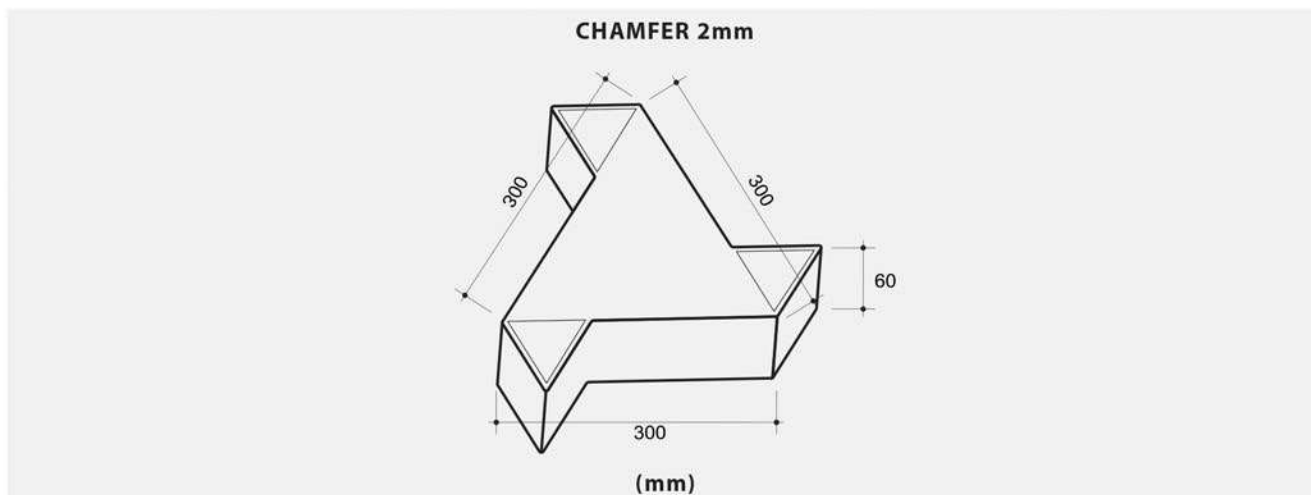

STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches

Driveways


Landscaping

Patios

Residential streets

Pedestrian Malls

All products are also available in
Beach Grade recipes.

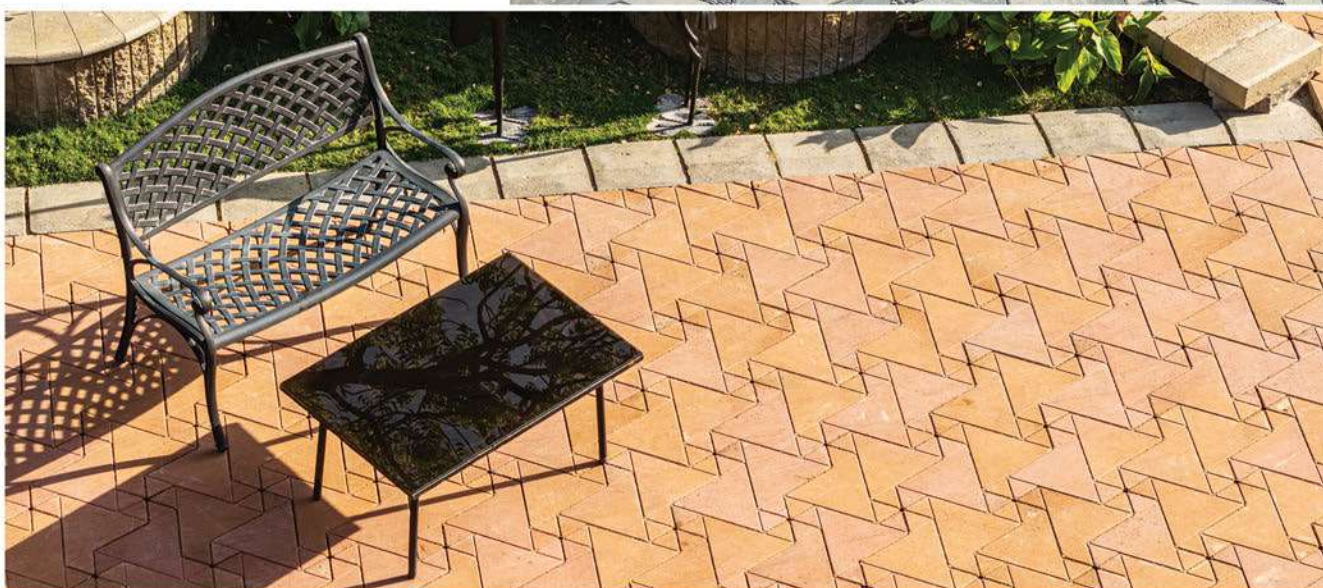

OLD TOWN



DESCRIPTION

Old Town paver combines timeless charm with exceptional durability. Designed to create a strong interlocking bond that ensures lasting stability in any outdoor space, its classic style pairs beautifully with its robust structure that resists wear & tear, and is weather resistant. Perfect for courtyards, patios, and pathways, **Old Town Paver** delivers both strength and elegance for a floor that stands the test of time.


Product	Sizes (mm)	Quantity Per Pallet
Old Town	200mm(l) x 50mm(w) x 60mm(t)	124 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Charcoal, Grey, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

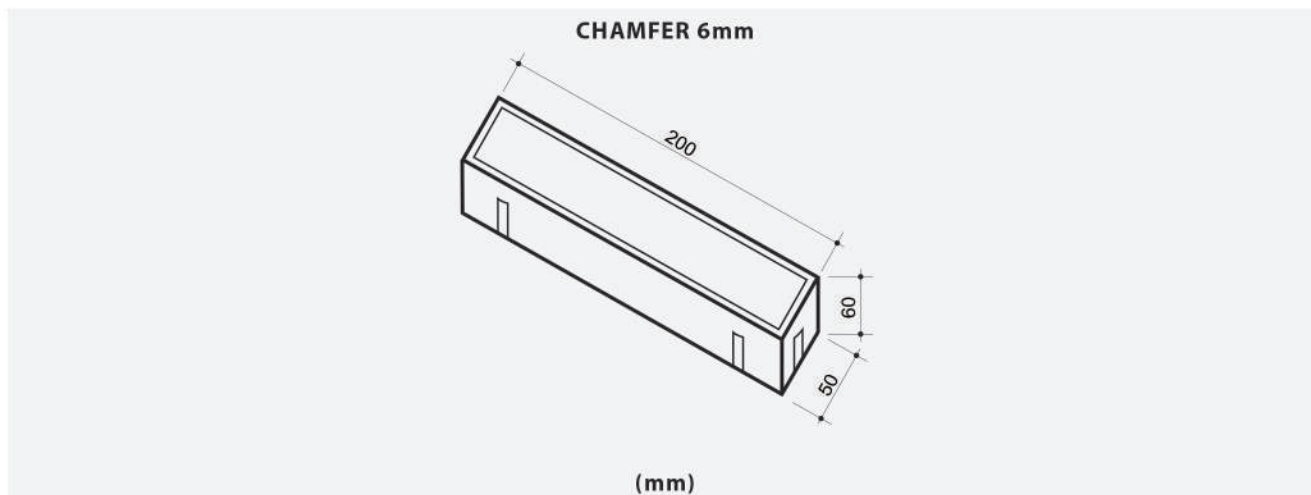


STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.

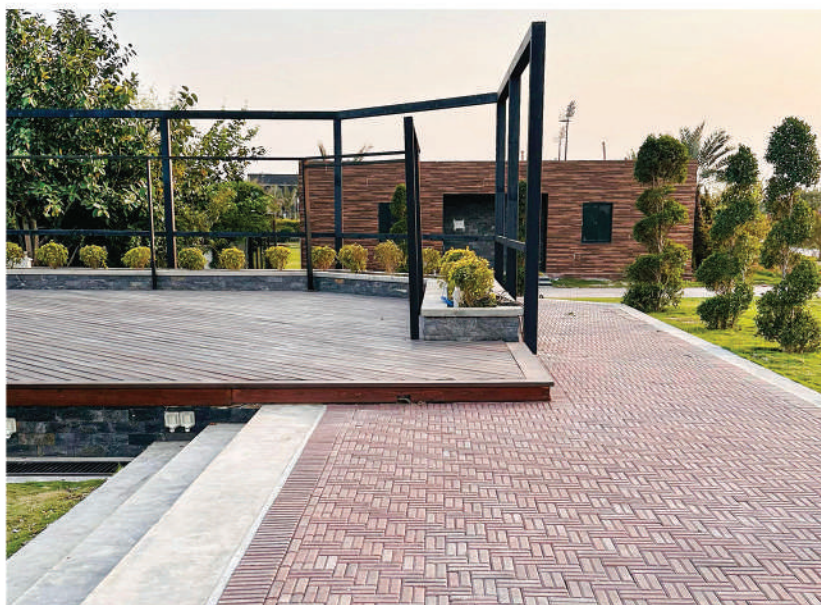

AUTUMN LEAF



DESCRIPTION

Bringing in gentle curves into paving, **Autumn Leaf paver** creates attractive patterns and pleasing lines. Available in a wide variety of colours **Autumn Leaf paver** introduces a distinct pattern that is suitable for most paving applications.


Product	Sizes (mm)	Quantity Per Pallet
Autumn Leaf	200mm(l) x 200mm(w) x 60mm(t)	137 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

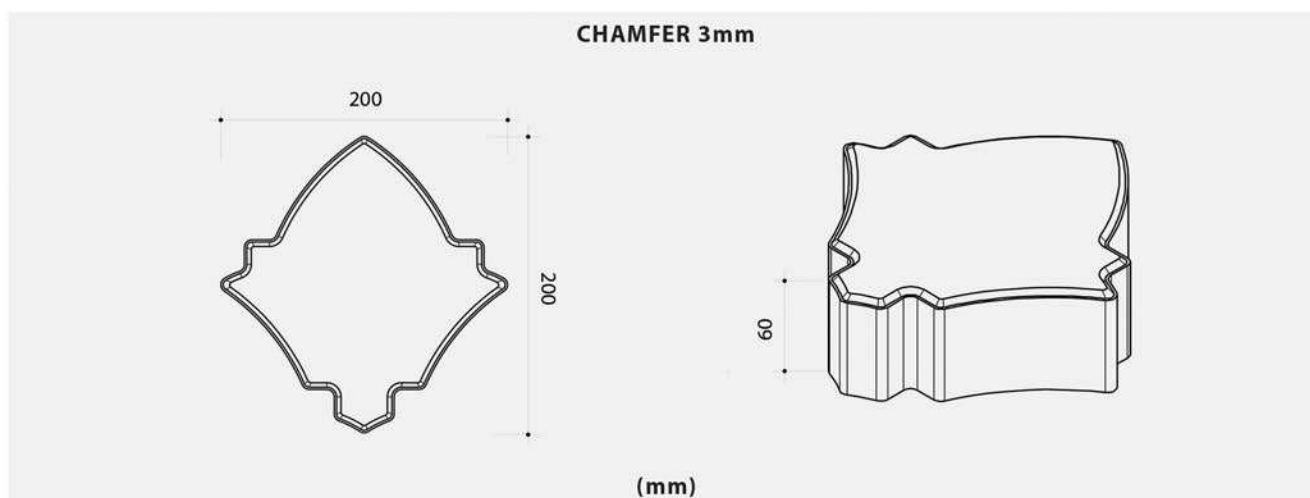


STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.

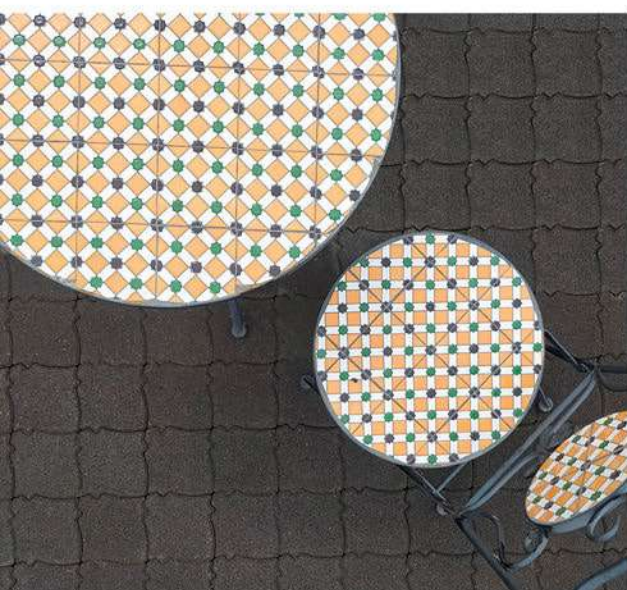

ROMAN CLASSIC



DESCRIPTION

Roman Classic paver helps introduce a sense of mature architecture with the advantages of **Roman paver**. They go a step beyond and create a touch of antiquity building an environment of classical proportions with a delightful accent of discerning taste and sophistication.


Product	Sizes (mm)	Quantity Per Pallet
Roman Classic	197mm(l) x 130mm(w) x 60mm(t)	164 SFT
	130mm(l) x 130mm(w) x 60mm(t)	
	130mm(l) x 64mm(w) x 60mm(t)	

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

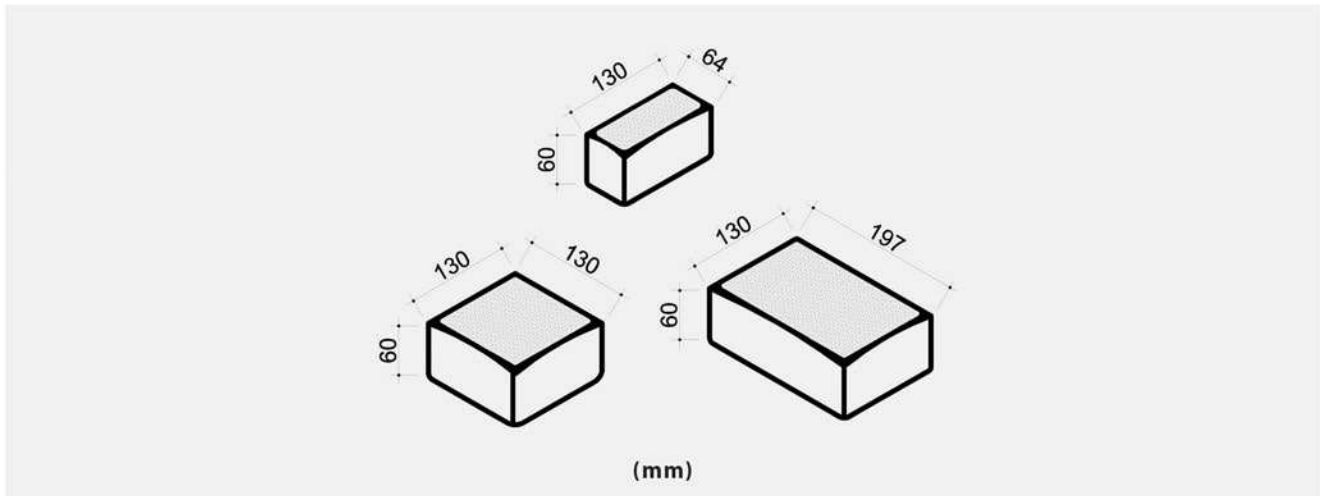


STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in Beach Grade recipes.

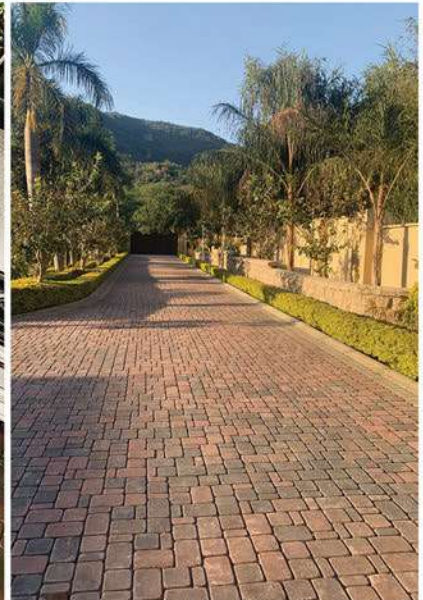

CLASSICO



DESCRIPTION

Classico pavers offer an attractive and distinctive paving system that presents the timeless beauty of cobble stones. Available in a combination of two distinct shapes that allows these pavers to be easily installed even in circular and curved patterns.


Product	Sizes (mm)	Quantity Per Pallet
Classico	115mm(l) x 115mm(w) x 60mm(t)	117 SFT
	115mm(l) x 115/60mm(w) x 60mm(t)	

Tolerance ± 3 mm on height
Tolerance ± 2 mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

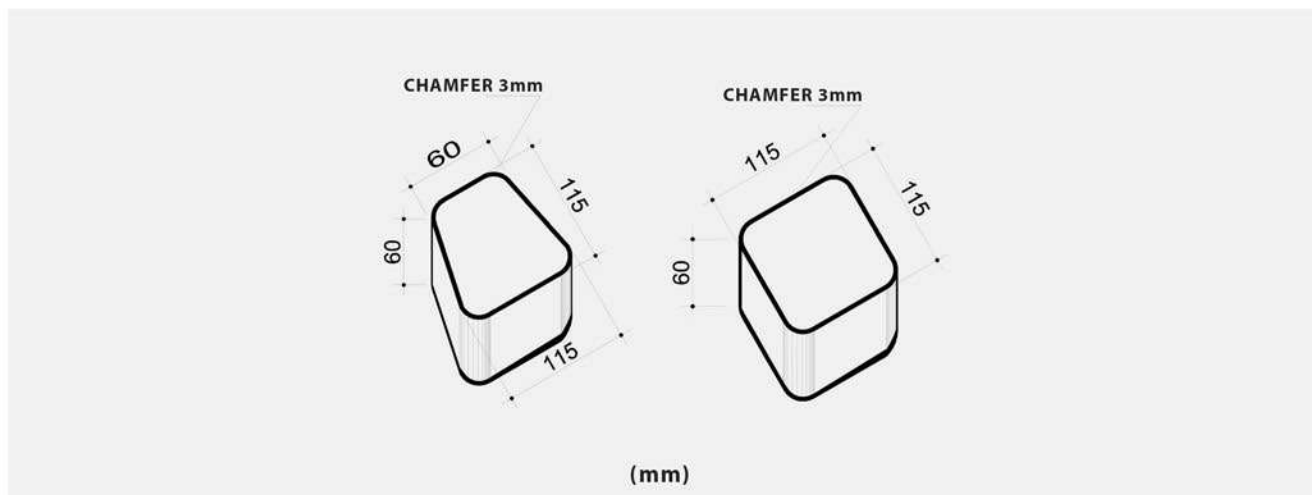

STRENGTH

Up to 5000 - 6000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in Beach Grade recipes.



BOSTON



DESCRIPTION

Boston paver are the perfect flooring material for a modern touch with simplicity of design. These are ideally suited for driveways, exterior flooring, patios, and walkways. The different sizes of **Boston paver** can be combined to create unique patterns for a modern or classical touch.


Product	Sizes (mm)	Quantity Per Pallet
Boston	500mm(l) x 500mm(w) x 50mm(t)	151 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Gold, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

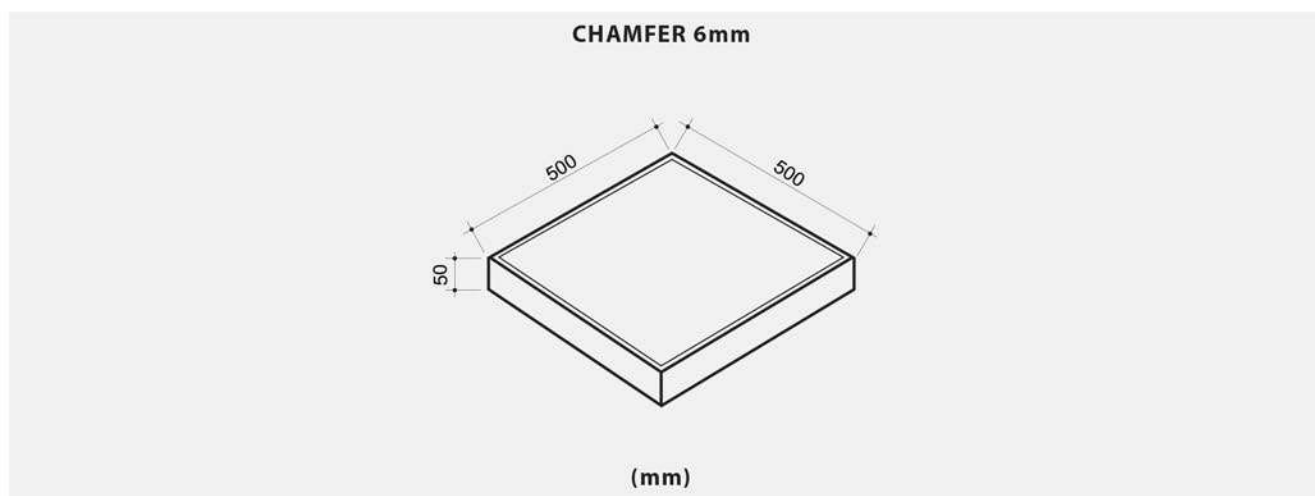


STRENGTH

Up to 3000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in Beach Grade recipes.

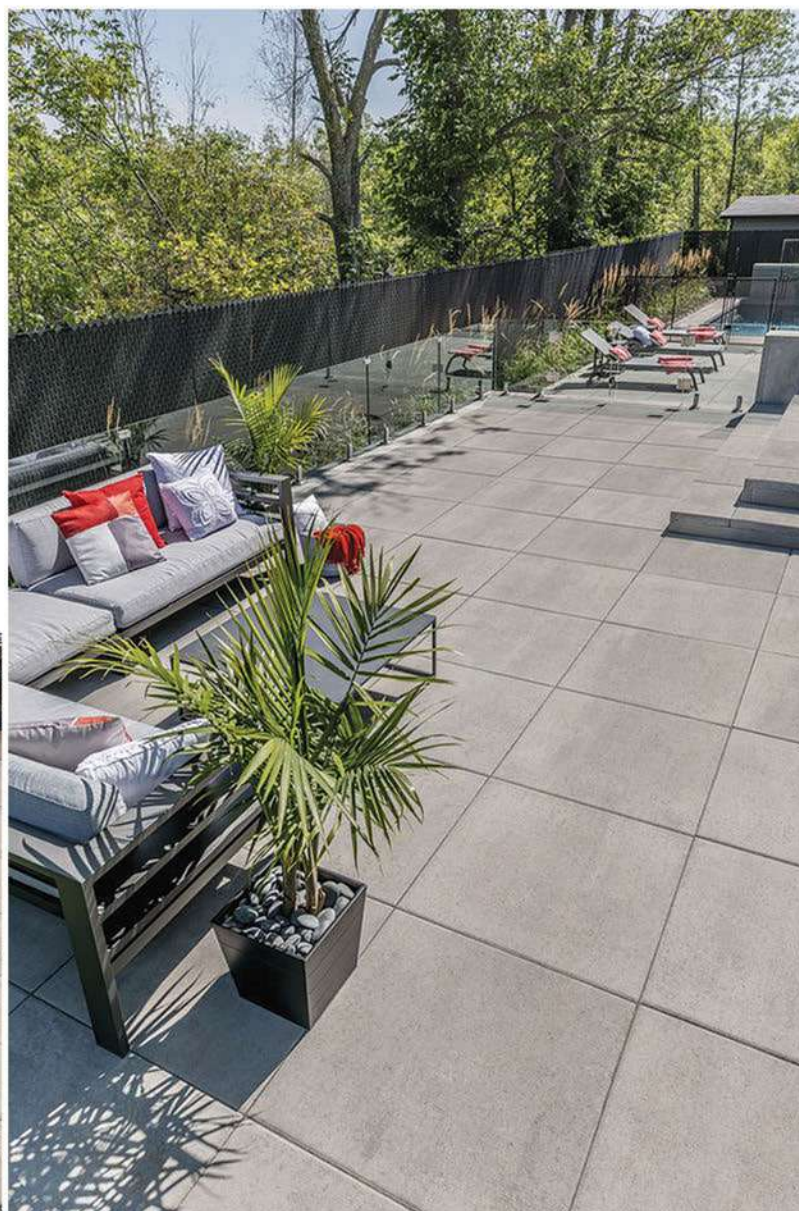

BOSTON



DESCRIPTION

Boston paver are the perfect flooring material for a modern touch with simplicity of design. These are ideally suited for driveways, exterior flooring, patios, and walkways. The different sizes of **Boston paver** can be combined to create unique patterns for a modern or classical touch.


Product	Sizes (mm)	Quantity Per Pallet
Boston	457mm(l) x 457mm(w) x 40mm(t)	180 SFT
	297mm(l) x 297mm(w) x 40mm(t)	240 SFT
	297mm(l) x 297mm(w) x 50mm(t)	240 SFT

Tolerance ± 3 mm on height
Tolerance ± 2 mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

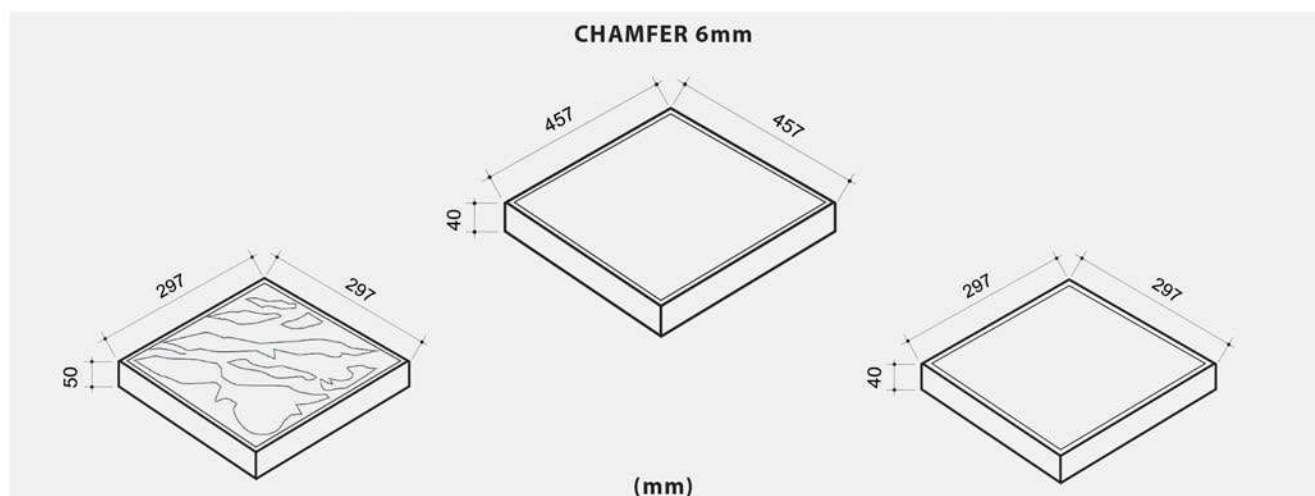


STRENGTH

Up to 3000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in Beach Grade recipes.

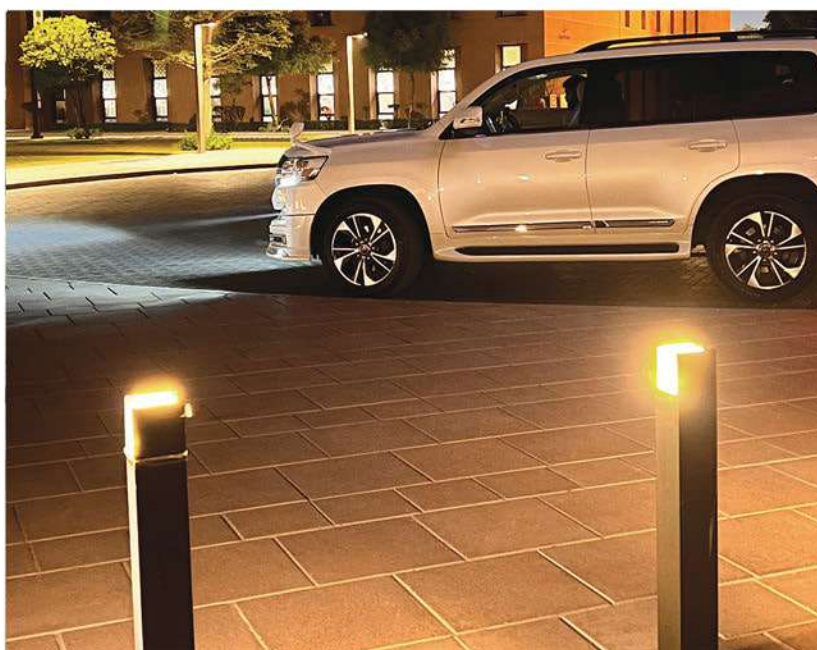

CLASSIC SQUARE



DESCRIPTION

Engineered to withstand heavy commercial use, the **Classic Square** paving system offers a powerful lasting impression that combines rugged functionality and timeless visual appeal. With the ability to integrate in a variety of manicured turf designs the **Classic Square's** robust hardscape seamlessly fuses strength with style providing a low maintenance resilient paving system for your property that is safe and sophisticated.


Product	Sizes (mm)	Quantity Per Pallet
Classic Square	150mm(l) x 150mm(w) x 60mm(t)	140 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

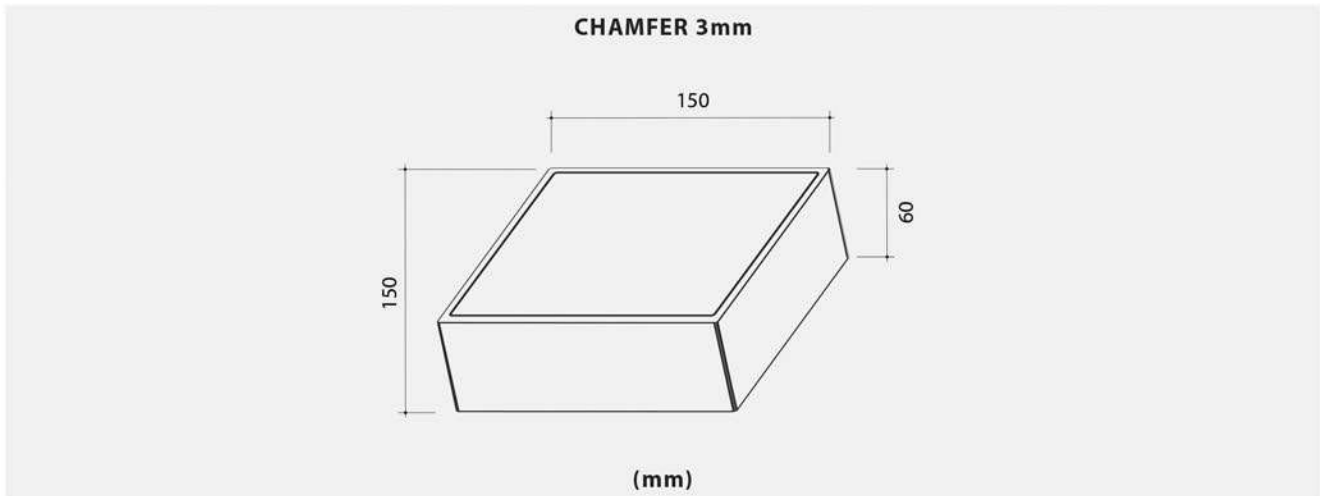

STRENGTH

Up to 6000 - 8000 psi, depending on the nature of the application.


BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.



FAN PAVER

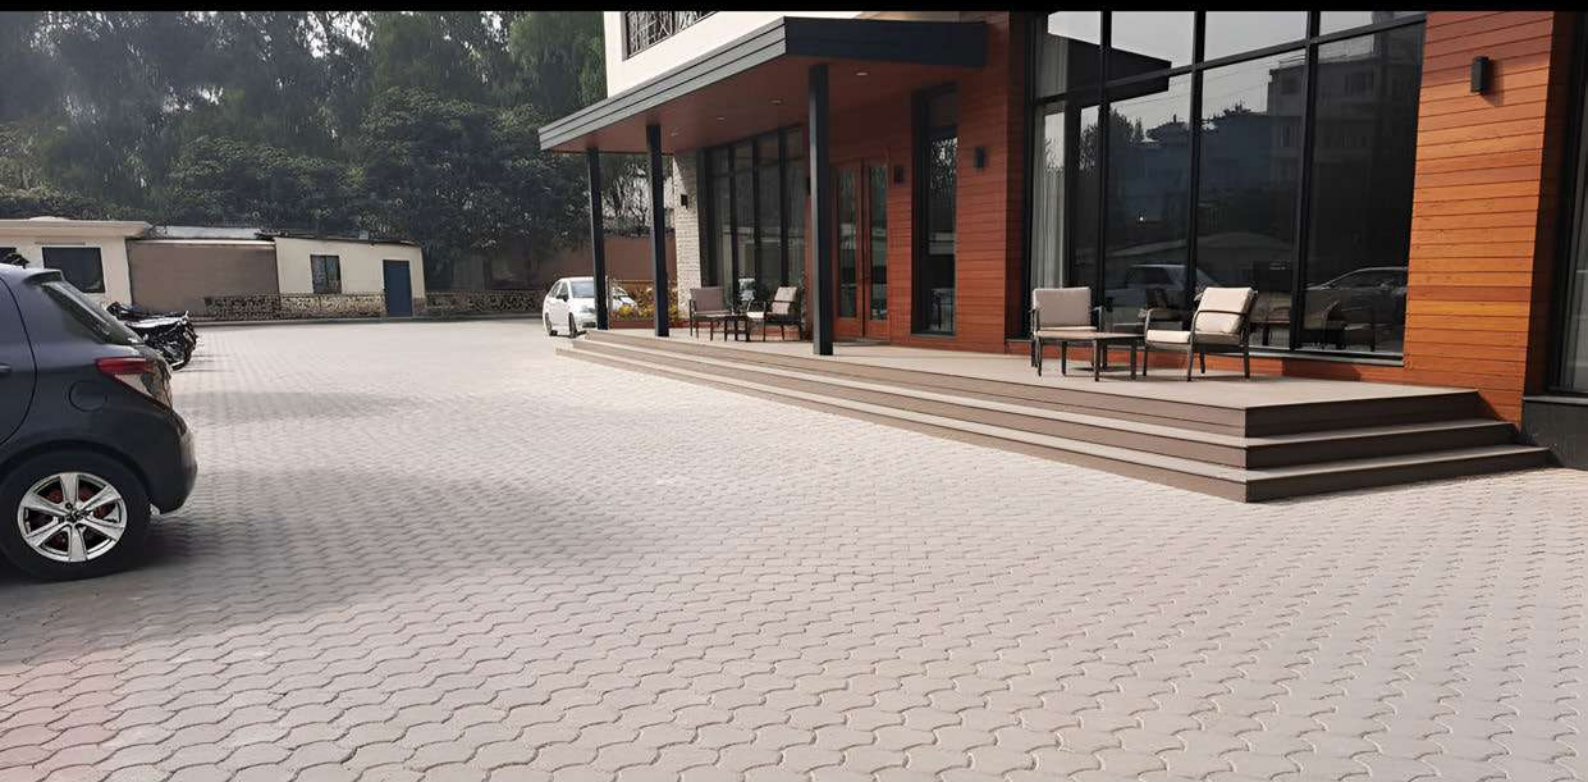

DESCRIPTION

Fan Paver offers our customers with the ability to build a safe, beautiful, and low maintenance environment that reflects uncompromising quality from the very first step. Our heavy duty **Fan Paver** for patios and walkways provides an inviting yet incredibly durable paving system that is designed to handle continuous traffic without fail elevating your property's exterior with hardscaping built for the long haul.


Product	Sizes (mm)	Quantity Per Pallet
Fan Paver	200mm(l) x 200mm(w) x 60mm(t)	106 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

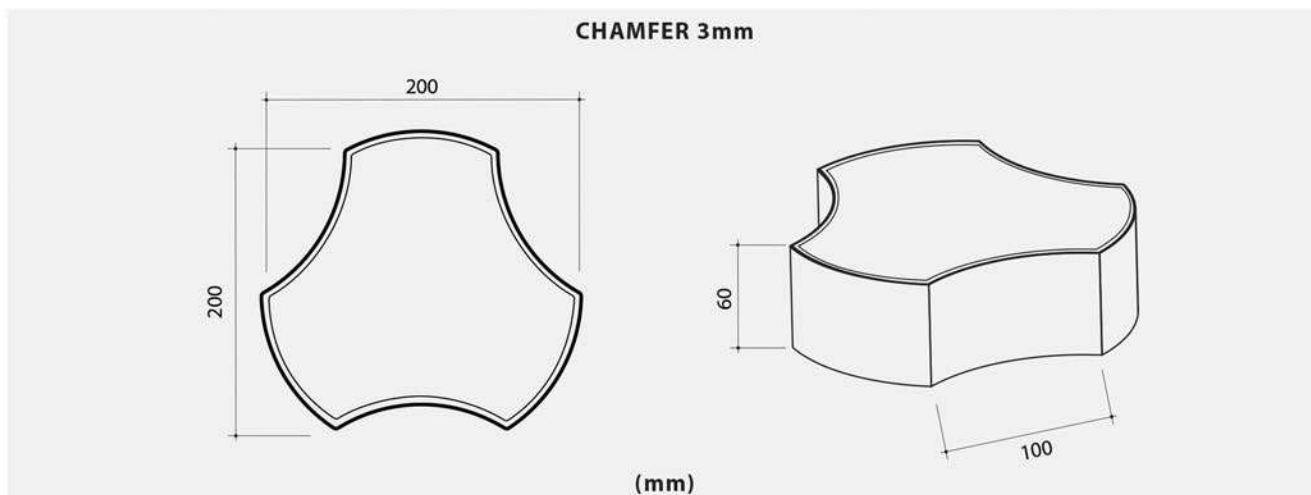

STRENGTH

Up to 6000 - 8000 psi, depending on the nature of the application.


BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.



CITY PAVER

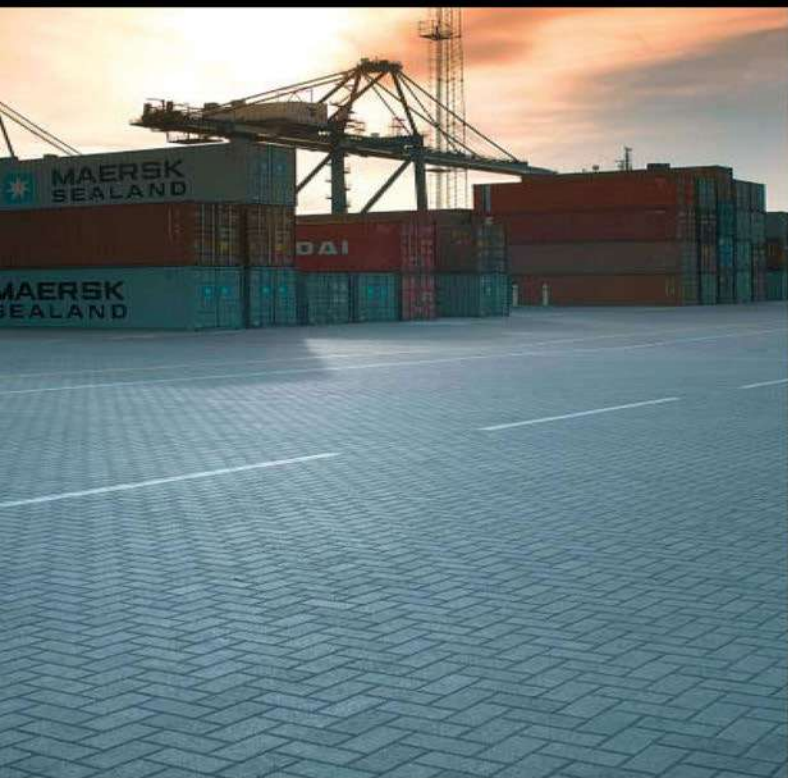

DESCRIPTION

City Paver, very easy to install and ideally suited for heavy loads and high traffic areas; their familiar brick shape helps create endless design permutations, combining patterns through the variety of available colors.


Product	Sizes (mm)	Quantity Per Pallet
City	197mm(l) x 97mm(w) x 50mm(t)	172 SFT
	197mm(l) x 97mm(w) x 60mm(t)	128 SFT
	197mm(l) x 97mm(w) x 80mm(t)	126 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

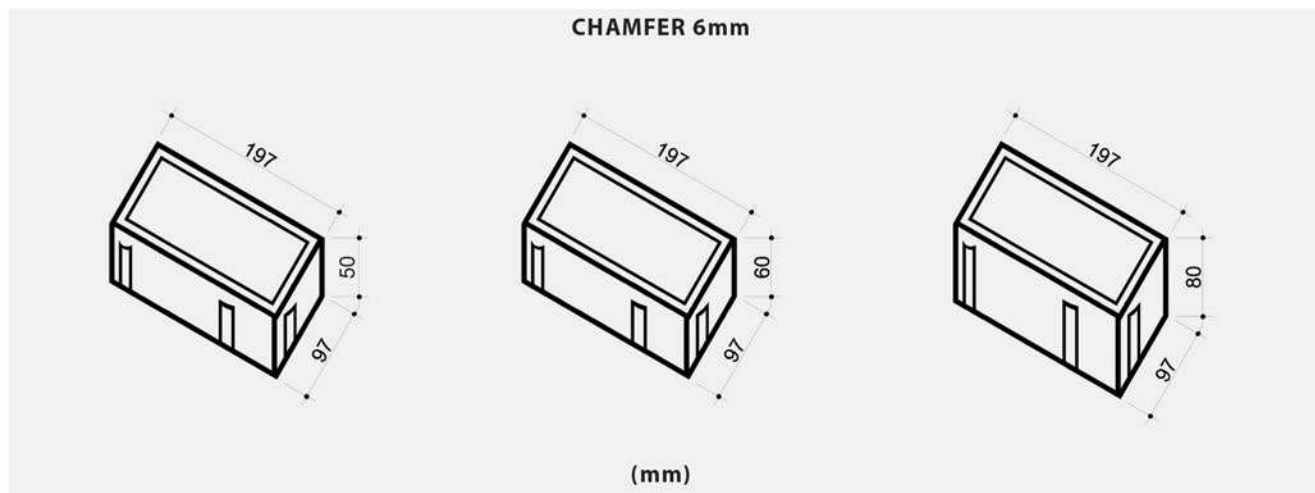

STRENGTH

Up to 6000 - 8000 psi, depending on the nature of the application.

Testing standard (BS-6717 Part-1)1993


BASIC APPLICATIONS

Driveways, Patios
Car porches, Parking areas
Residential streets
Landscaping, Parks
Pedestrian Malls
Walkways and footpaths
Medians
Bus stops and terminals
Bridge ramps
Bridge underpasses
Slope and erosion control
Airports
Heavy traffic areas

ADDITIONAL APPLICATIONS

For making steps
Edging of flower beds and walk ways

All products are also available in
Beach Grade recipes.

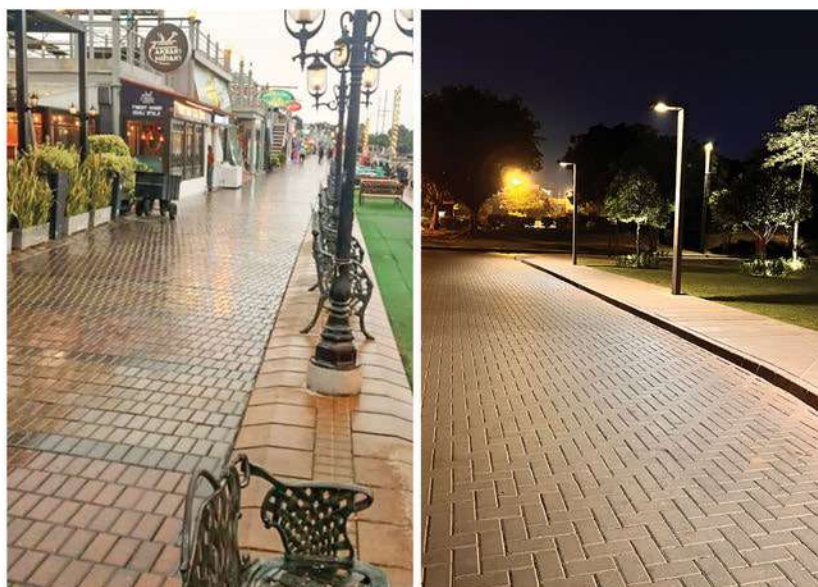

QUADRA



DESCRIPTION

Quadra is a “two shape” paver ideally suited for residential and domestic applications that combines aesthetics with strong lines, helping create stunning landscapes and hard standing areas, even in solid colours.


Product	Sizes (mm)	Quantity Per Pallet
Quadra	197mm(l) x 77/117mm(w) x 60mm(t)	130 SFT
	197mm(l) x 77/117mm(w) x 80mm(t)	130 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

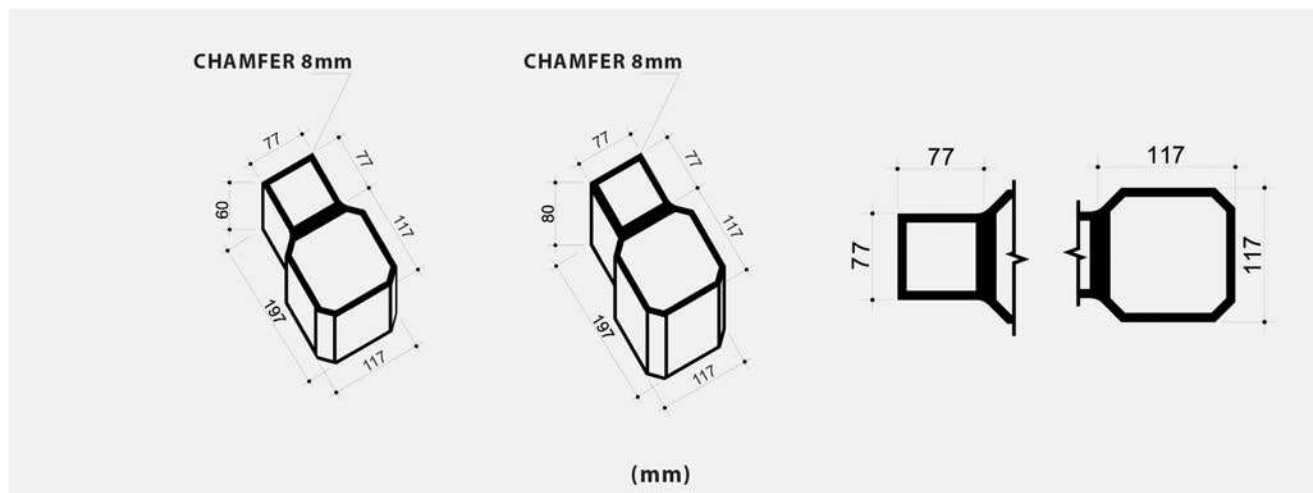

STRENGTH

Up to 6000 - 8000 psi, depending on the nature of the application.

Testing standard (BS-6717 Part-1)1993

BASIC APPLICATIONS

Driveways, Patios
Car porches, Parking areas
Residential streets
Landscaping, Parks
Pedestrian Malls
Walkways and footpaths
Medians
Bus stops and terminals
Bridge ramps
Bridge underpasses
Slope and erosion control
Airports
Heavy traffic areas

ADDITIONAL APPLICATIONS

For making steps
Edging of flower beds and walk ways

All products are also available in
Beach Grade recipes.



COBBLE



DESCRIPTION

Cobble paver, similar to City paver in size and shape. It has a dividing line on the top surface which after installation depicts a 4" x 4" grid that looks equally elegant in mono or random colours for domestic or commercial applications.


Product	Sizes (mm)	Quantity Per Pallet
Cobble	197mm(l) x 97mm(w) x 80mm(t)	128 SFT
	197mm(l) x 97mm(w) x 60mm(t)	128 SFT
	197mm(l) x 97mm(w) x 50mm(t)	128 SFT

Tolerance ± 3 mm on height
Tolerance ± 2 mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

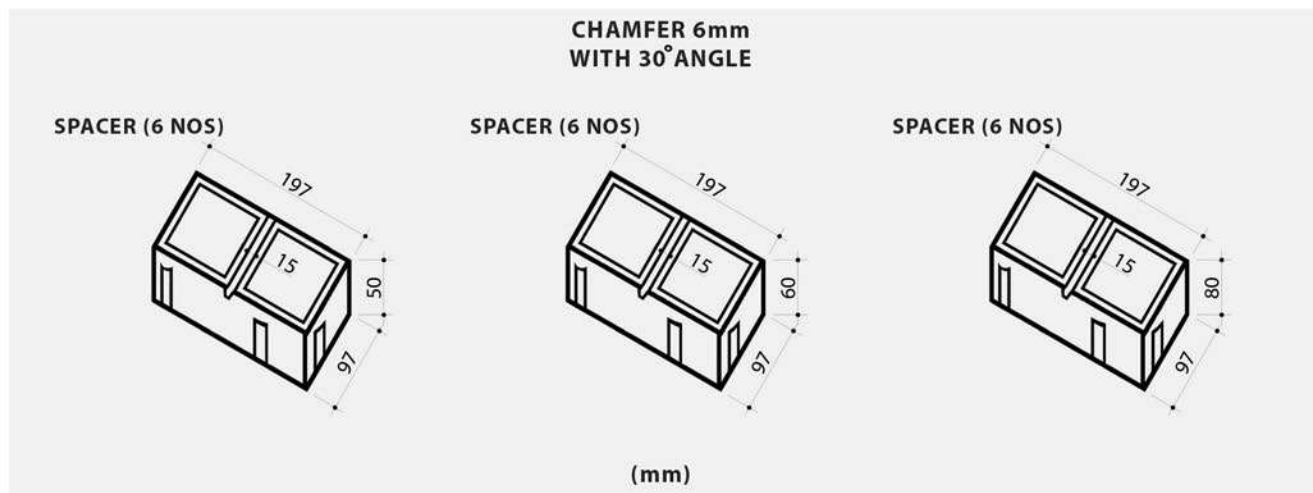

STRENGTH

Up to 6000 - 8000 psi, depending on the nature of the application.

Testing standard (BS-6717 Part-1)1993


BASIC APPLICATIONS

Driveways, Patios
Car porches, Parking areas
Residential streets
Landscaping, Parks
Pedestrian Malls
Walkways and footpaths
Medians
Bus stops and terminals
Bridge ramps
Bridge underpasses
Slope and erosion control
Airports
Heavy traffic areas

ADDITIONAL APPLICATIONS

For making steps
Edging of flower beds and walk ways

All products are also available in
Beach Grade recipes.

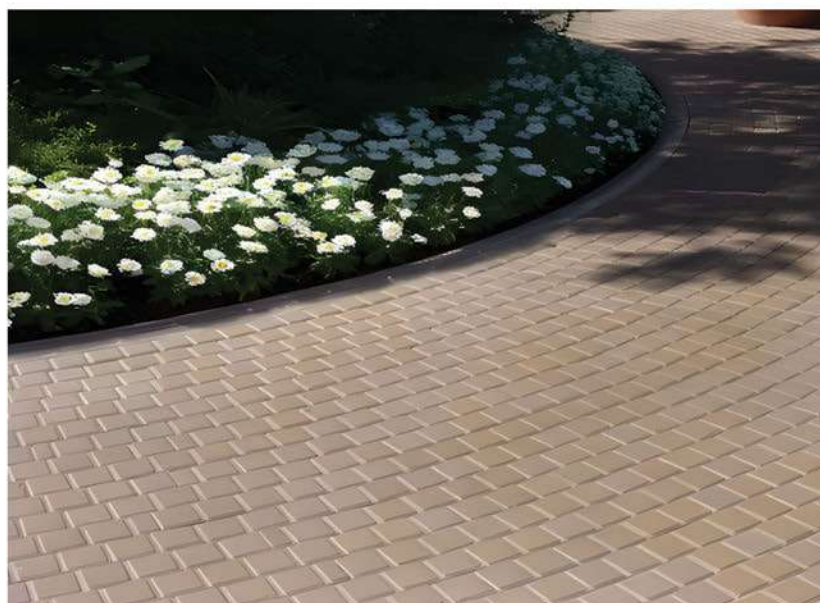

FLAT



DESCRIPTION

Flat paver is a simple reflection of sharp cut stone slabs, ideally suited for use in combination with other materials like pebbles, grass, or even simple grooves to create a high abrasion resistant surface with a soft look. It's beauty is in it's simple proportions, which can easily blend with any architectural or aesthetic requirement.


Product	Sizes (mm)	Quantity Per Pallet
Flat	450mm(l) x 300mm(w) x 40mm(t)	180 SFT

Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

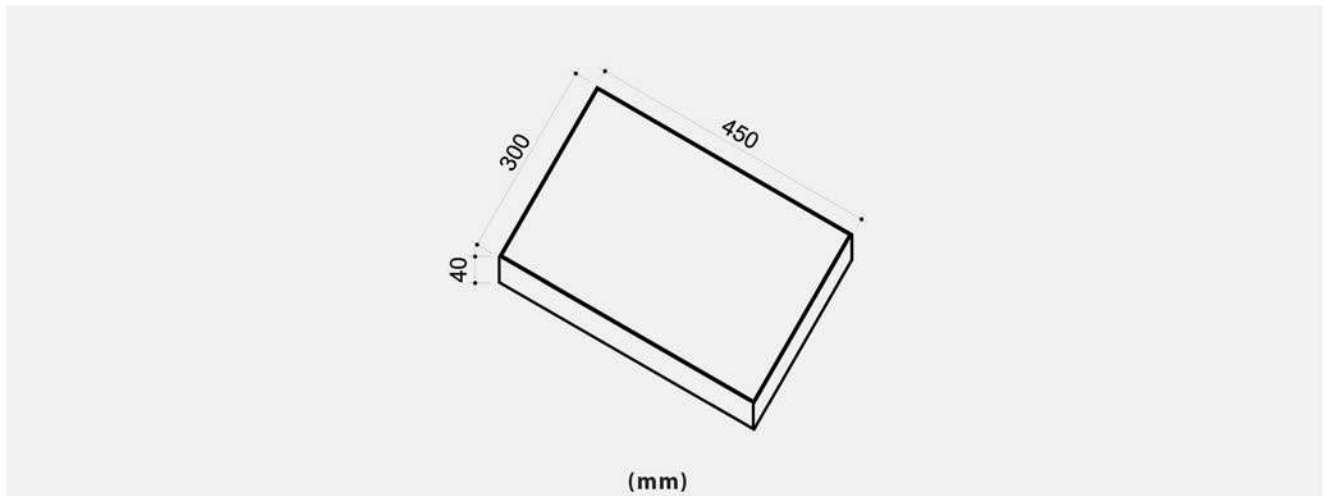


STRENGTH

Up to 3000 psi, depending on the nature of the application.


BASIC APPLICATIONS

Car Porches
Driveways
Landscaping
Patios
Residential streets
Pedestrian Malls

All products are also available in
Beach Grade recipes.

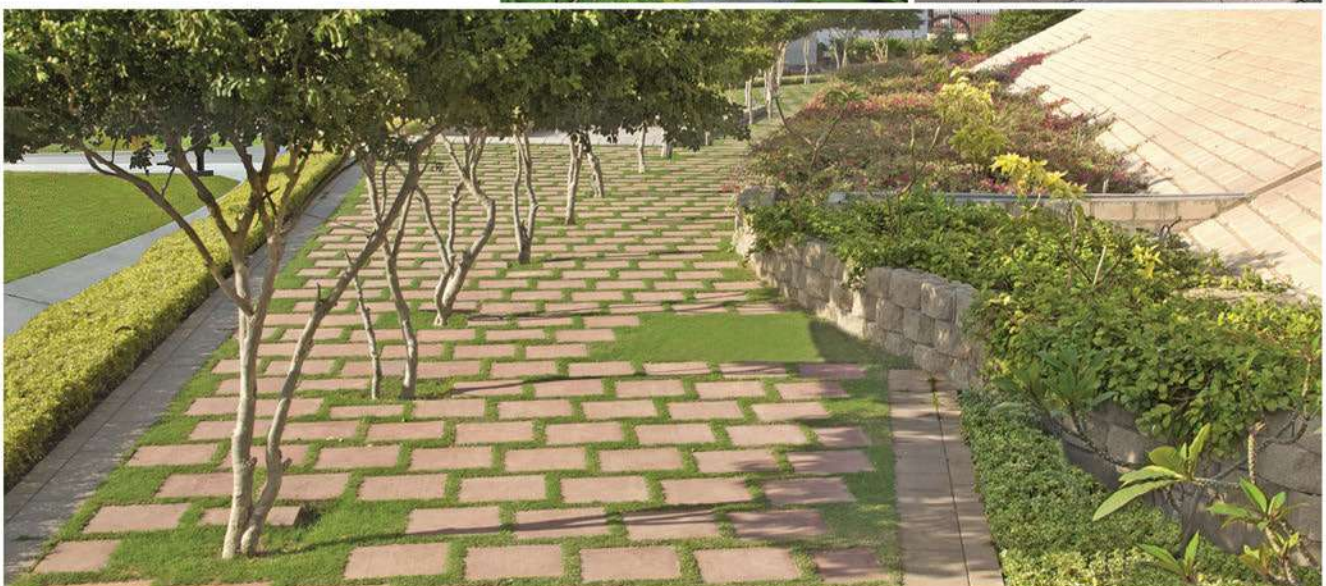

HOLLOW/CELLULAR

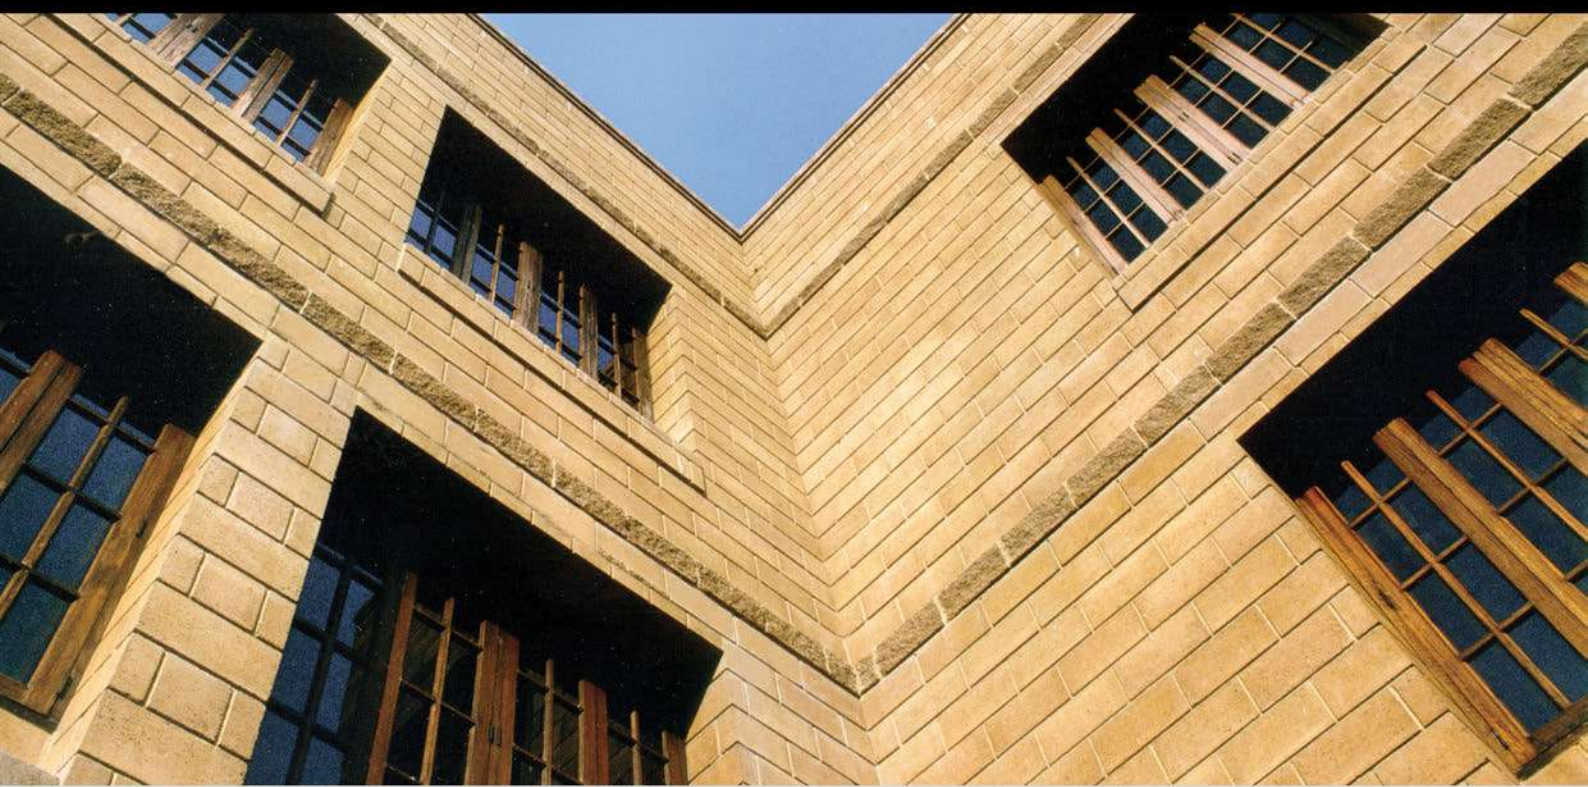

DESCRIPTION

Hollow Blocks are available in a variety of colours, grades, and sizes for a multitude of applications.

STANDARD DENSE - High density/strength block for internal and external use where extra load bearing capacity is required. May or may not require plaster/paint.

FAIR FACED, PIGMENTED, AND ARCHITECTURAL MASONRY BLOCKS - "Smooth Finished" blocks for internal or external applications that do not require plaster or paint and are maintenance free.

Product	Sizes (mm)	Quantity Per Pallet
Hollow / Cellular	390mm(l) x 190mm(h) x 90mm(t)	132 PCS
	390mm(l) x 190mm(h) x 140mm(t)	105 PCS
	390mm(l) x 190mm(h) x 190mm(t)	75 PCS


Tolerance±3mm on height
Tolerance±2mm on sides

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

FAIR FACE

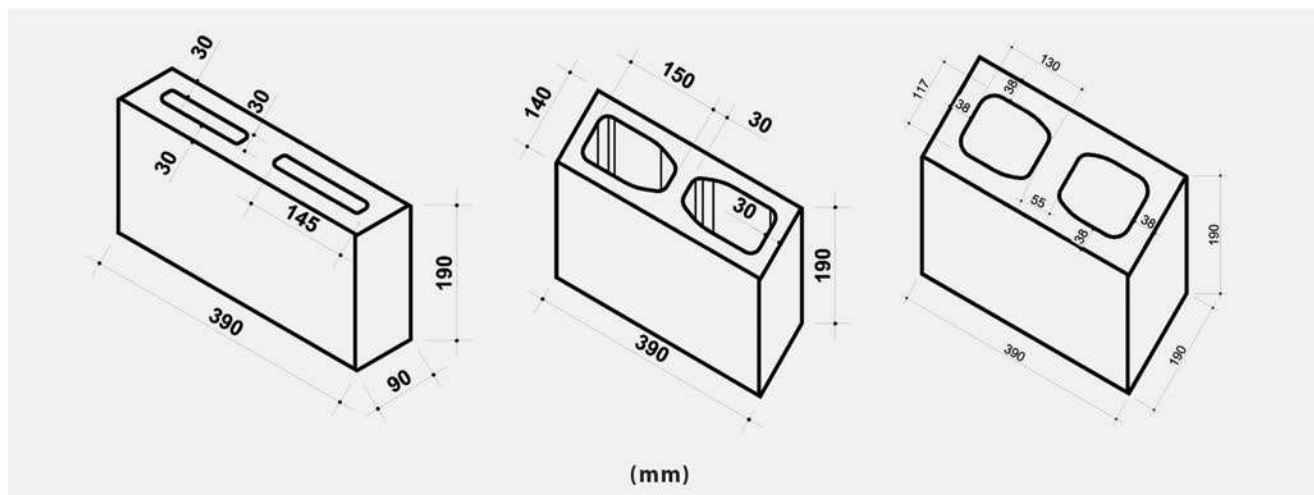

STRENGTH

Up to 1000 psi, depending on the nature of the application.

BASIC APPLICATIONS

- Boundary walls
- Partition walls
- Load bearing walls
- Facades and elevations
- Interior & exterior walls
- Landscaping, decorative and featured walls

ADDITIONAL APPLICATIONS

- 90mm block for cladding
- For edging of pathways and flower beds
- For window sills
- and many more

All products are also available in Beach Grade recipes.



HOLLOW STONE



DESCRIPTION

Hollow Stone Blocks are a unique blend of two different types of blocks; Hollow blocks and envistone veneer. It gives tremendous advantages in terms of cost savings and time. These blocks are used as smooth face on one side and stone finish on the other. Since this is a complete hollow block, it eliminates the need to first make a wall and then clad it. It can be ideally used for the exterior shell of buildings where a stone finish is required on the outside and the interior surface is required to be smooth. This smooth surface can be plastered and or painted if required. **Hollow Stone blocks** can be used on their own or combined with other **envicrete** products to design attractive and practical wall surfaces.


Product	Sizes (mm)	Quantity Per Pallet
Hollow Stone	390mm(l) x 190mm(h) x 140mm(w)	90 PCS

* Also available as cellular stone
Tolerance $\pm 3\text{mm}$

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

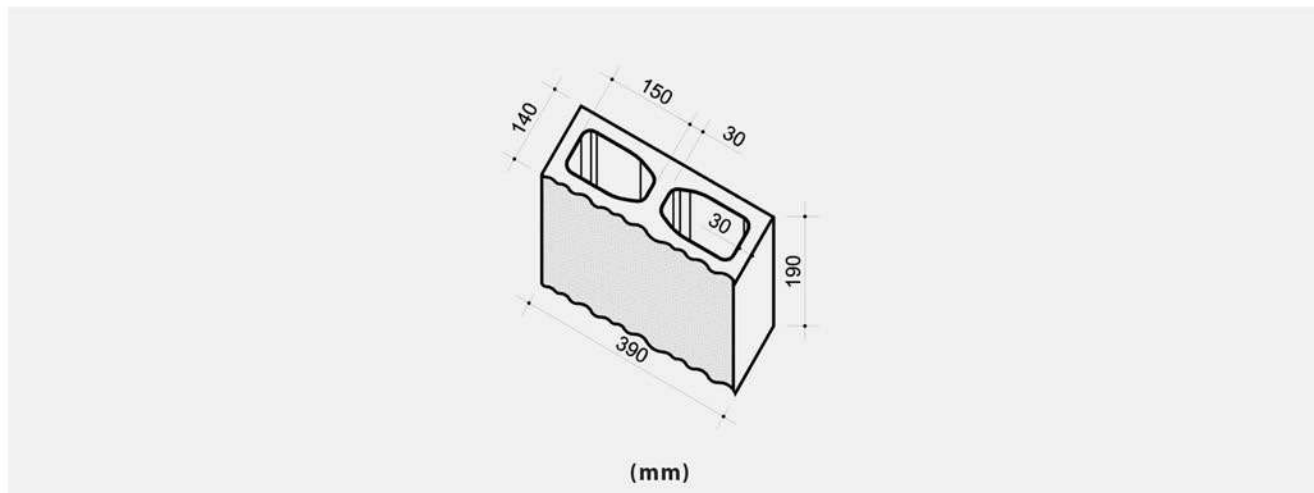

STRENGTH

Up to 1000 psi, depending on the nature of the application.


BASIC APPLICATIONS

Boundary walls
 Partition walls
 Load bearing walls
 Facades and elevations
 Interior & exterior walls
 Landscaping decorative and featured walls

All products are also available in Beach Grade recipes.



SOLID BLOCK

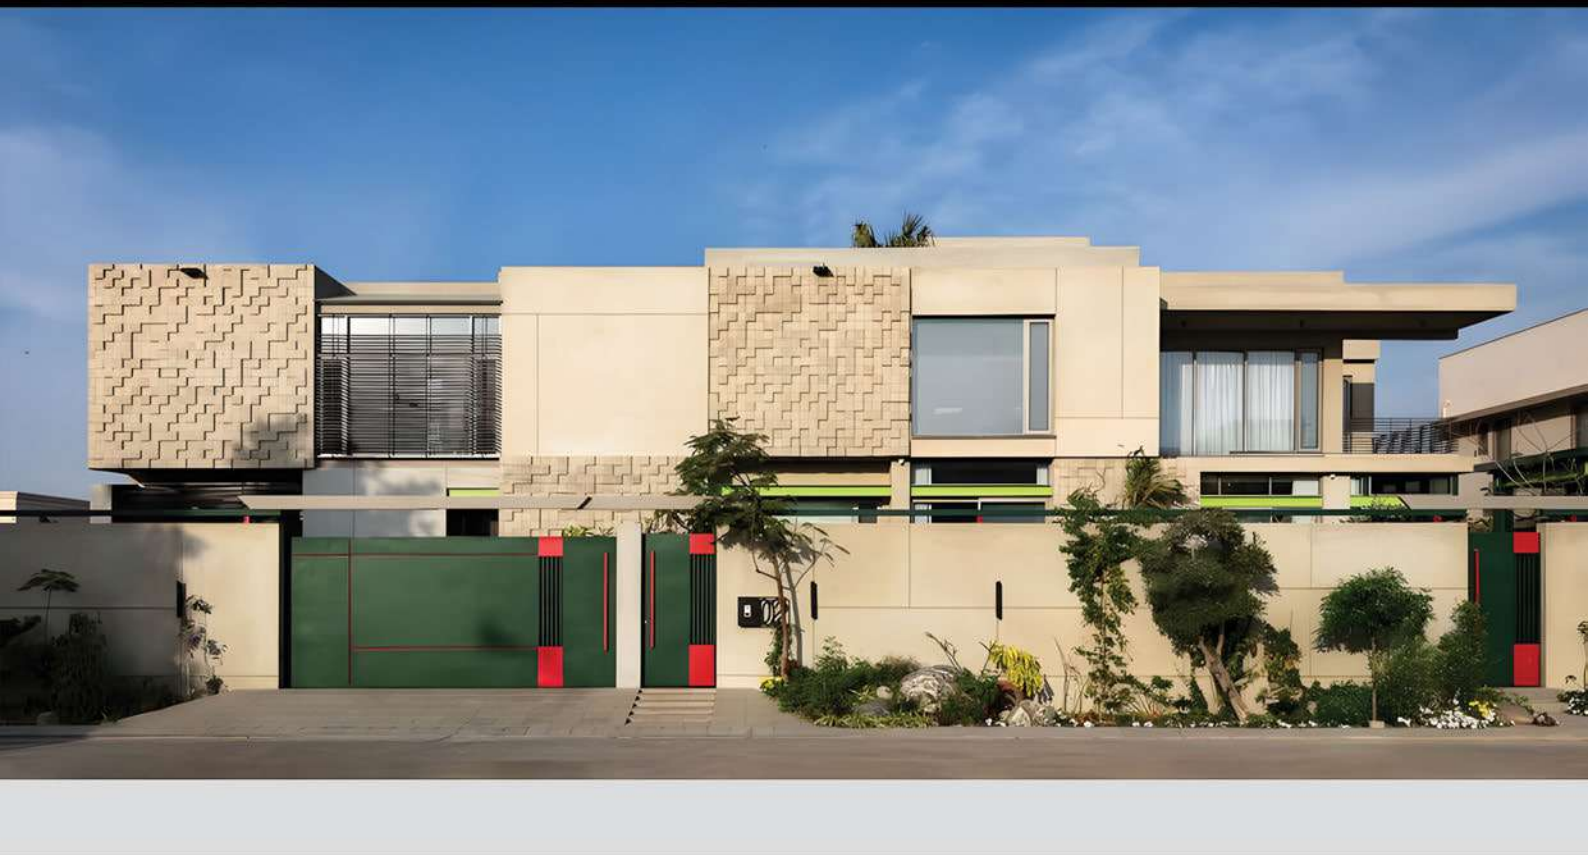

DESCRIPTION

Solid Blocks are ideal for load bearing applications reducing the cost of steel + RCC. Solid blocks are available in various grades and sizes for a multitude of applications.

STANDARD DENSE - High density/strength, load bearing block for internal and external use. May or may not require plaster/paint.

FILLER - "Open Texture" block for normal load bearing use. Requires plaster or rendering.

FAIR FACED / PIGMENTED - "Smooth Finished" block for load bearing application. Does not require plaster or paint. Maintenance free.

Product	Sizes (mm)	Quantity Per Pallet
Solid Block	390mm(l) x 190mm(h) x 90mm(t)	120 PCS
	390mm(l) x 190mm(h) x 140mm(t)	93 PCS
	390mm(l) x 190mm(h) x 190mm(t)	75 PCS


Tolerance $\pm 3\text{mm}$

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

FAIR FACE

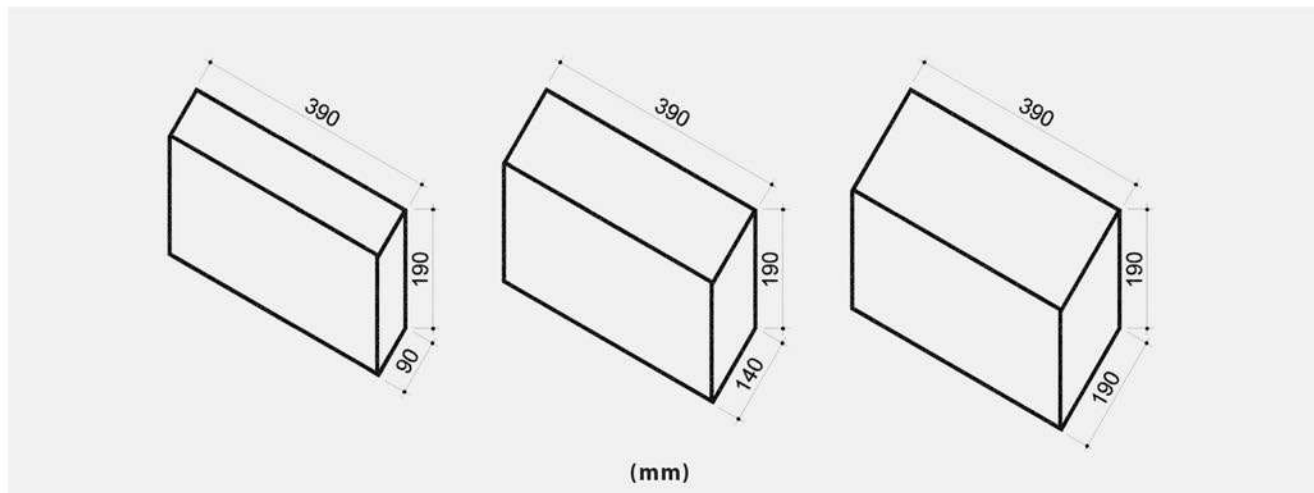

STRENGTH

Up to 1500 psi, depending on the nature of the application.

BASIC APPLICATIONS

- Boundary walls
- Partition walls
- Load bearing walls
- Facades and elevations
- Interior & exterior walls
- Landscaping decorative and featured walls


ADDITIONAL APPLICATIONS

- For edging of pathways and flower beds
- For planters
- For making steps
- For window sills

All products are also available in Beach Grade recipes.



MASONRY/STANDARD BLOCK

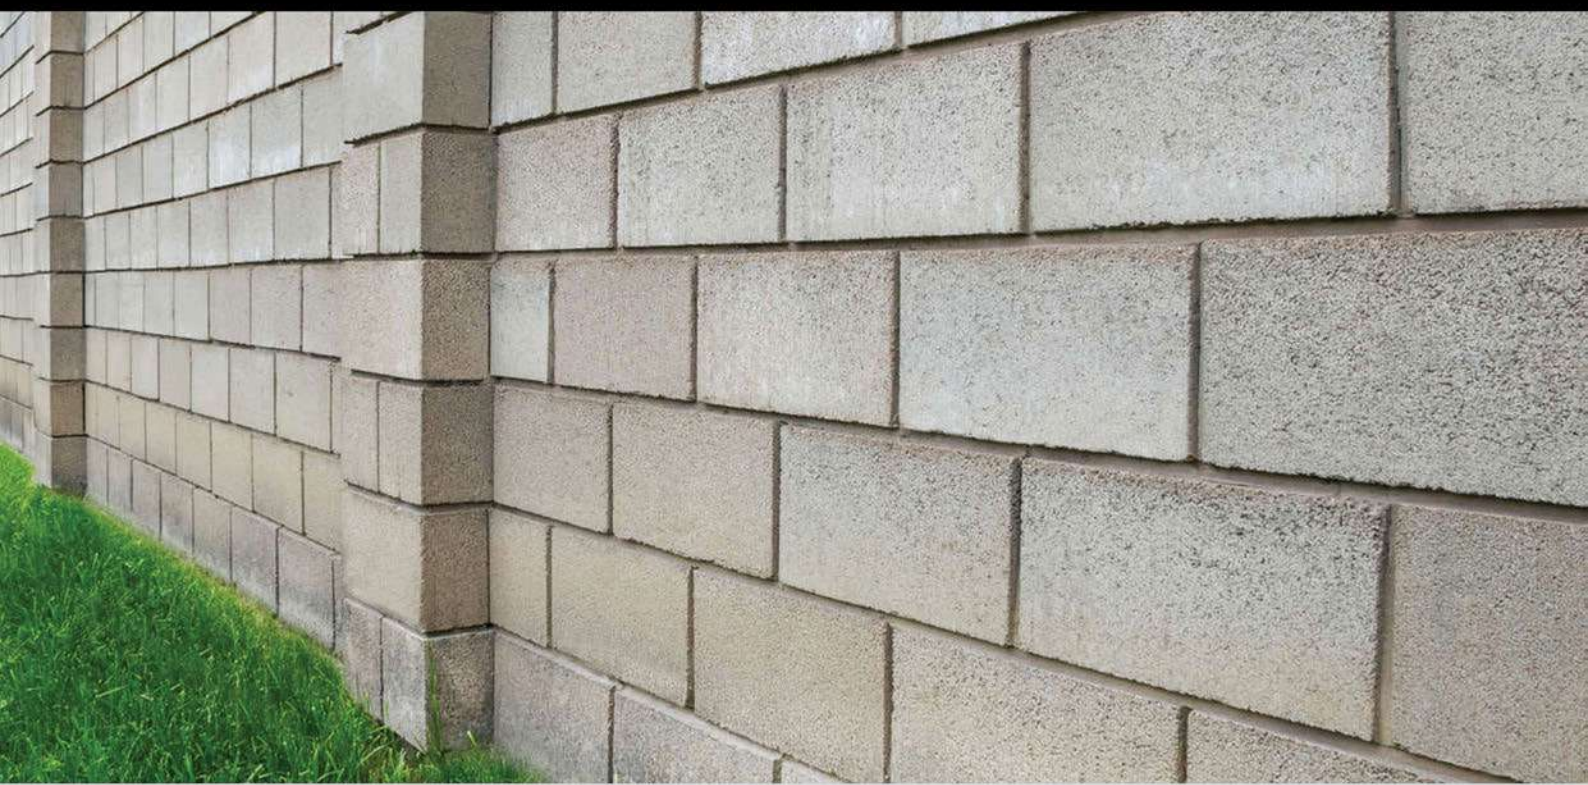

DESCRIPTION

envicrete Filler/Standard **Hollow Blocks** range is a specialized product designed to provide quality conscious clients with a superb quality filler block to reduce the cost of plastering and increase workability on wall surfaces. These blocks are specially designed to create a better bond with plastering mortar / cladding materials, and at the same time are easy to cut for conducting etc. without compromising on strength. Their superb dimensional accuracy makes achieving smooth, plastered / rendered painted finishes so much easier.


Product	Sizes (mm)	Quantity Per Pallet
Masonry Hollow Block	390mm(l) x 190mm(h) x 90mm(t)	120 PCS
	390mm(l) x 190mm(h) x 140mm(t)	93 PCS
	390mm(l) x 190mm(h) x 190mm(t)	75 PCS

Tolerance±3mm

AVAILABLE COLOURS

Natural Grey.

DIMENSIONS AND SPECIFICATIONS

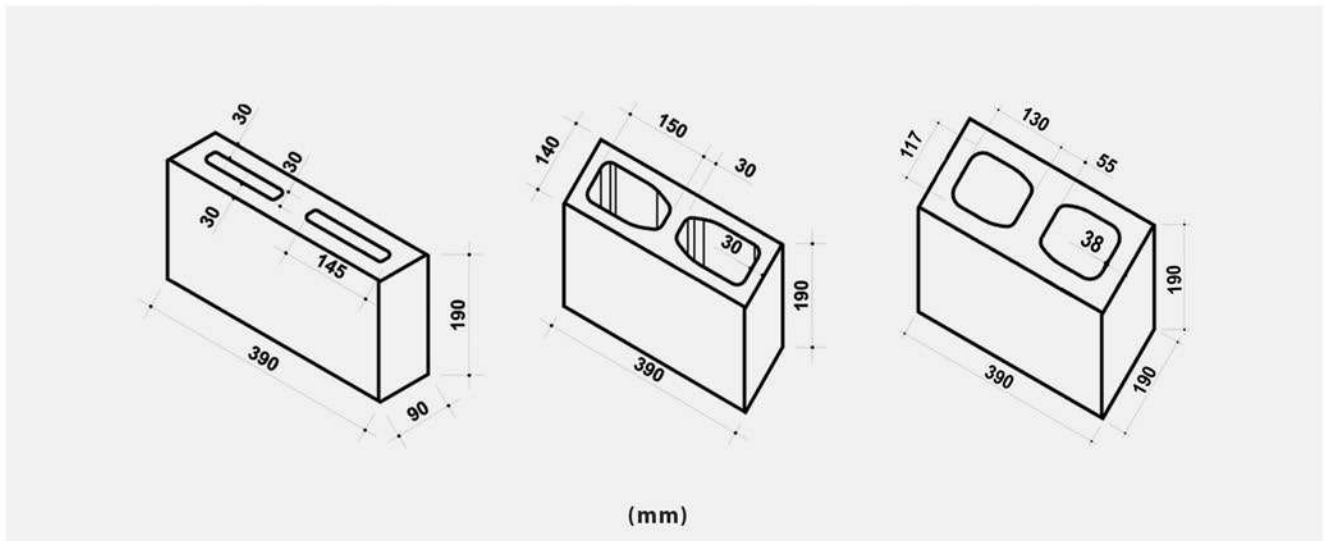



STRENGTH

Up to 800 psi, depending on the nature of the application.

BASIC APPLICATIONS

Boundary walls
Partition walls
Interior and exterior walls

All products are also available in Beach Grade recipes.

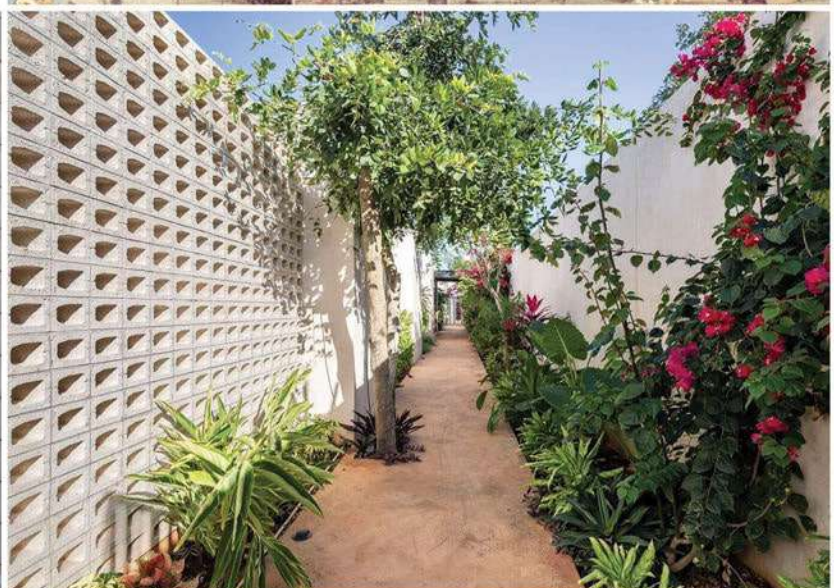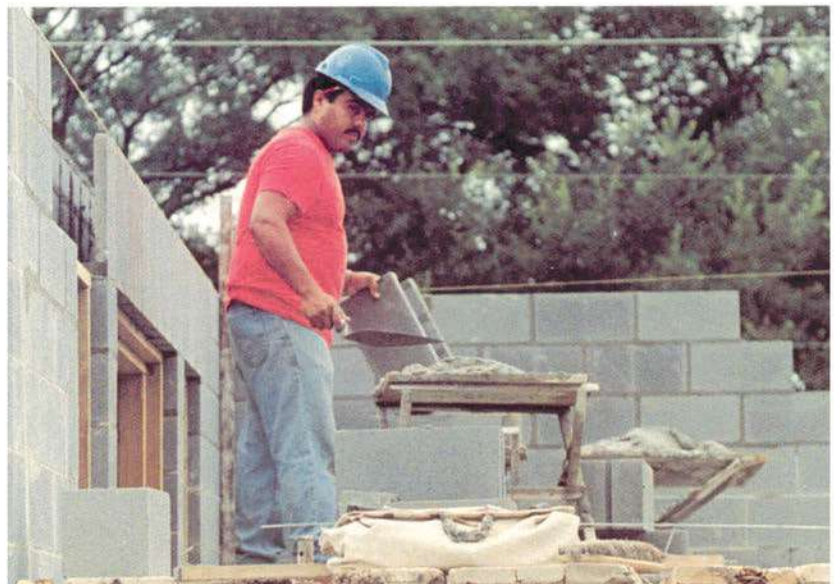

MASONRY/STANDARD BLOCK



DESCRIPTION

envicrete Filler/Standard **Solid Blocks** range is a specialized product designed to provide quality conscious clients with a superb quality filler block to reduce the cost of plastering and increase workability on wall surfaces. These blocks are specially designed to create a better bond with plastering mortar / cladding materials, and at the same time are easy to cut for conducting etc. without compromising on strength. Their superb dimensional accuracy makes achieving smooth, plastered / rendered painted finishes so much easier.


Product	Sizes (mm)	Quantity Per Pallet
Masonry Solid Block	300mm(l) x 203mm(h) x 102mm(t)	144 PCS
	300mm(l) x 203mm(h) x 127mm(t)	108 PCS
	300mm(l) x 203mm(h) x 152mm(t)	96 PCS
	203mm(l) x 203mm(h) x 300mm(t)	72 PCS

Tolerance $\pm 3\text{mm}$

AVAILABLE COLOURS

Natural Grey.

DIMENSIONS AND SPECIFICATIONS

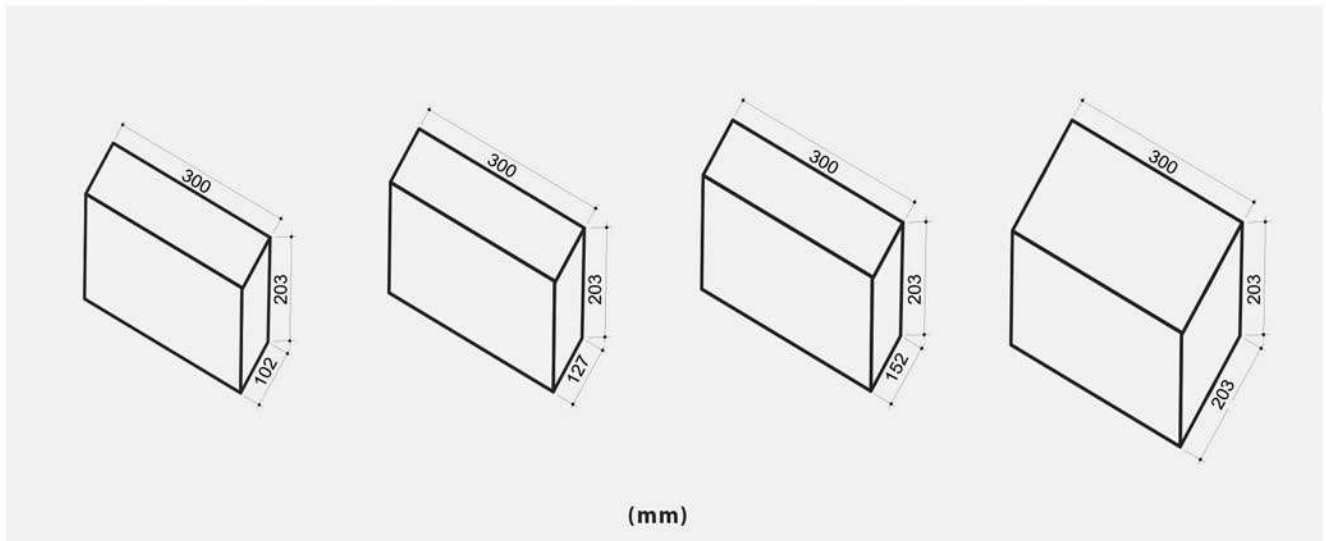

STRENGTH

Up to 1000 psi, depending on the nature of the application.

BASIC APPLICATIONS

Boundary walls
Partition walls
Interior and exterior walls

All products are also available in Beach Grade recipes.





DESCRIPTION

Envistone Architectural Masonry emulates the aesthetic appearance of natural stone, yet is cost effective, readily available and offers tremendous flexibility. It's broad range of sizes provide the capacity to create prestigious, traditional-style buildings easily and offers a palette of colors varied enough to complement the dominant regional features. **Envistone** can be used on its own to create buildings of subtle character or combined with other **enviarc** masonry products in feature panels or bands to create strikingly unique buildings.


Product	Sizes (mm)	Quantity Per Pallet
Envistone	390mm(l) x 190mm(h) x 90mm(t)	120 PCS
	390mm(l) x 190mm(h) x 70mm(t)	180 PCS
	390mm(l) x 90mm(h) x 90mm(t)	240 PCS
	190mm(l) x 190mm(h) x 190mm(t)	150 PCS
	190mm(l) x 140mm(h) x 190mm(t)	186 PCS
	190mm(l) x 90mm(h) x 90mm(t)	480 PCS
	390mm(l) x 40mm(h) x 95mm(t)	480 PCS
	197mm(l) x 60mm(h) x 48mm(t)	1200 PCS

Tolerance $\pm 2\text{mm}$

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

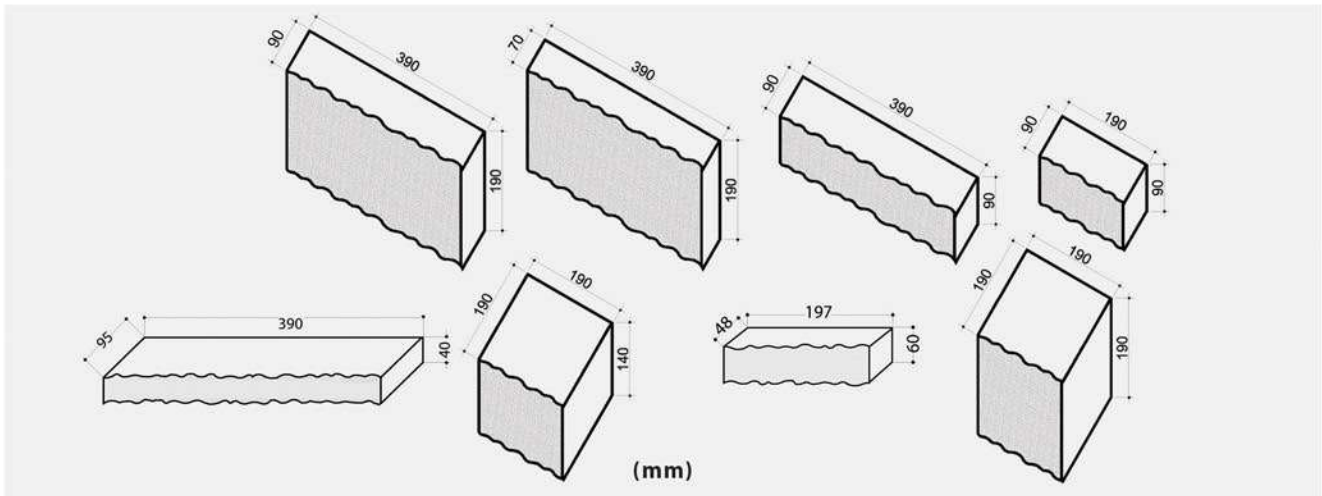

BASIC APPLICATIONS

Cladding of
Boundary walls
Partition walls
Facades and elevations
Interior & exterior walls
Landscaping
Decorative and featured vertical surfaces
Planters

All products are also available in
Beach Grade recipes.



KERBSTONES



DESCRIPTION

Kerbstones provide a high impact resistant edge to heavy traffic areas. Their rugged design and contours make these an ideal solution for edging of roads, highways and parking lots as well as industrial, commercial, public and residential landscaping. Their dense structure with special **envicrete** recipes make them resistant to sulphate attacks as well as erosion caused by subsoil salts and water logging.

Kerbstones can also be used as steps, sills and copings or combined with other envicrete masonry products to create smart architectural details. **envicrete Kerbstones** are custom manufactured for various applications.


Product	Sizes (mm)	Quantity Per Pallet
Kerbstone	450mm(h) x 600mm(l) x 150mm(t)	24 PCS
	450mm(h) x 300mm(l) x 150mm(t)	48 PCS
	304mm(h) x 914mm(l) x 127mm(t)	21 PCS
	304mm(h) x 914mm(l) x 60mm(t)	30 PCS
	204mm(h) x 914mm(l) x 127mm(t)	28 PCS
	204mm(h) x 914mm(l) x 100mm(t)	27 PCS
	300mm(h) x 300mm(l) x 450mm(t)	24 PCS
	150mm(h) x 600mm(l) x 75mm(t)	104 PCS
	100mm(h) x 600mm(l) x 254mm(t)	64 PCS

Tolerance $\pm 3\text{mm}$

AVAILABLE COLOURS

Varying shades of Charcoal, Grey, Red, & Yellow.

DIMENSIONS AND SPECIFICATIONS

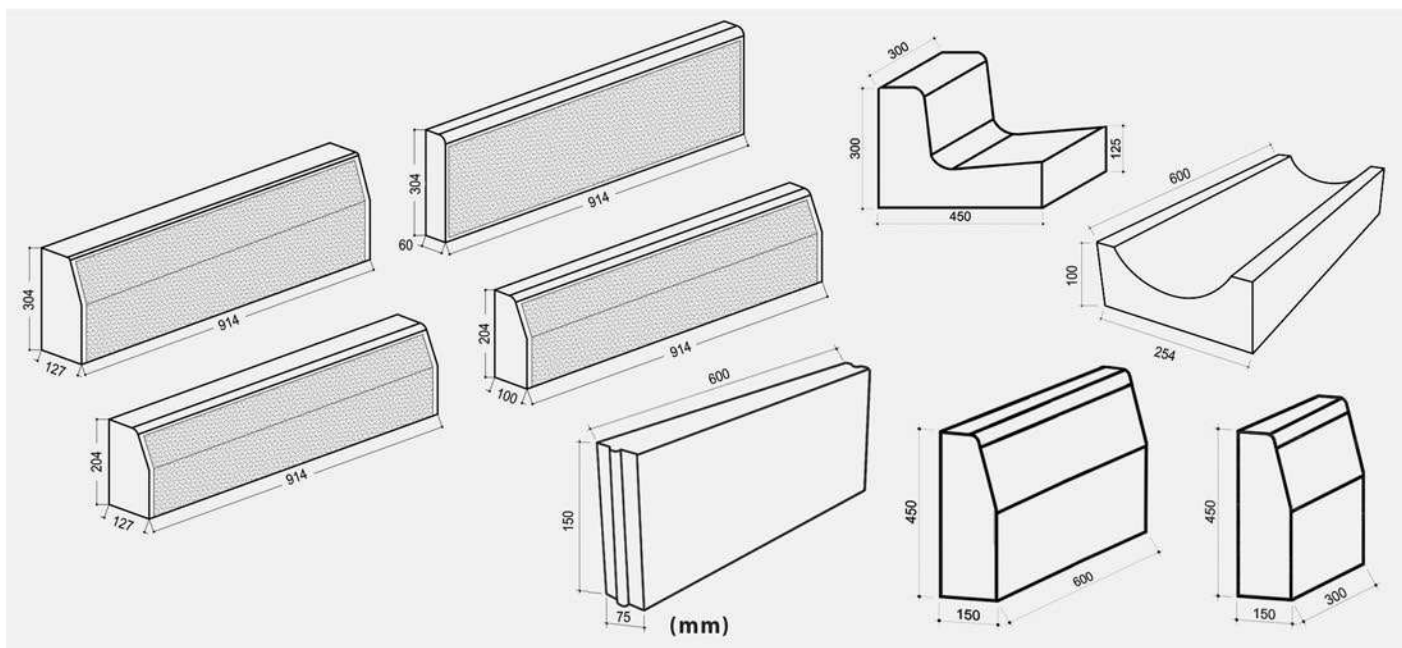

STRENGTH

Standard Kerbstones are manufactured to yield a minimum strength of 3000 psi.

Kerbstones required for municipal application and high traffic areas are manufactured to yield a strength of 3750 psi.

Testing standard (BS-7263)1994

Higher strength or special compositions
Kerbstones can also be manufactured
according to clients requests.

BASIC APPLICATIONS

Edging of high traffic areas

Re surfacing of existing road edges

Edging of light traffic areas

ADDITIONAL APPLICATIONS


For steps and coping

Benches

All products are also available in Beach Grade recipes.



KEYSTONE

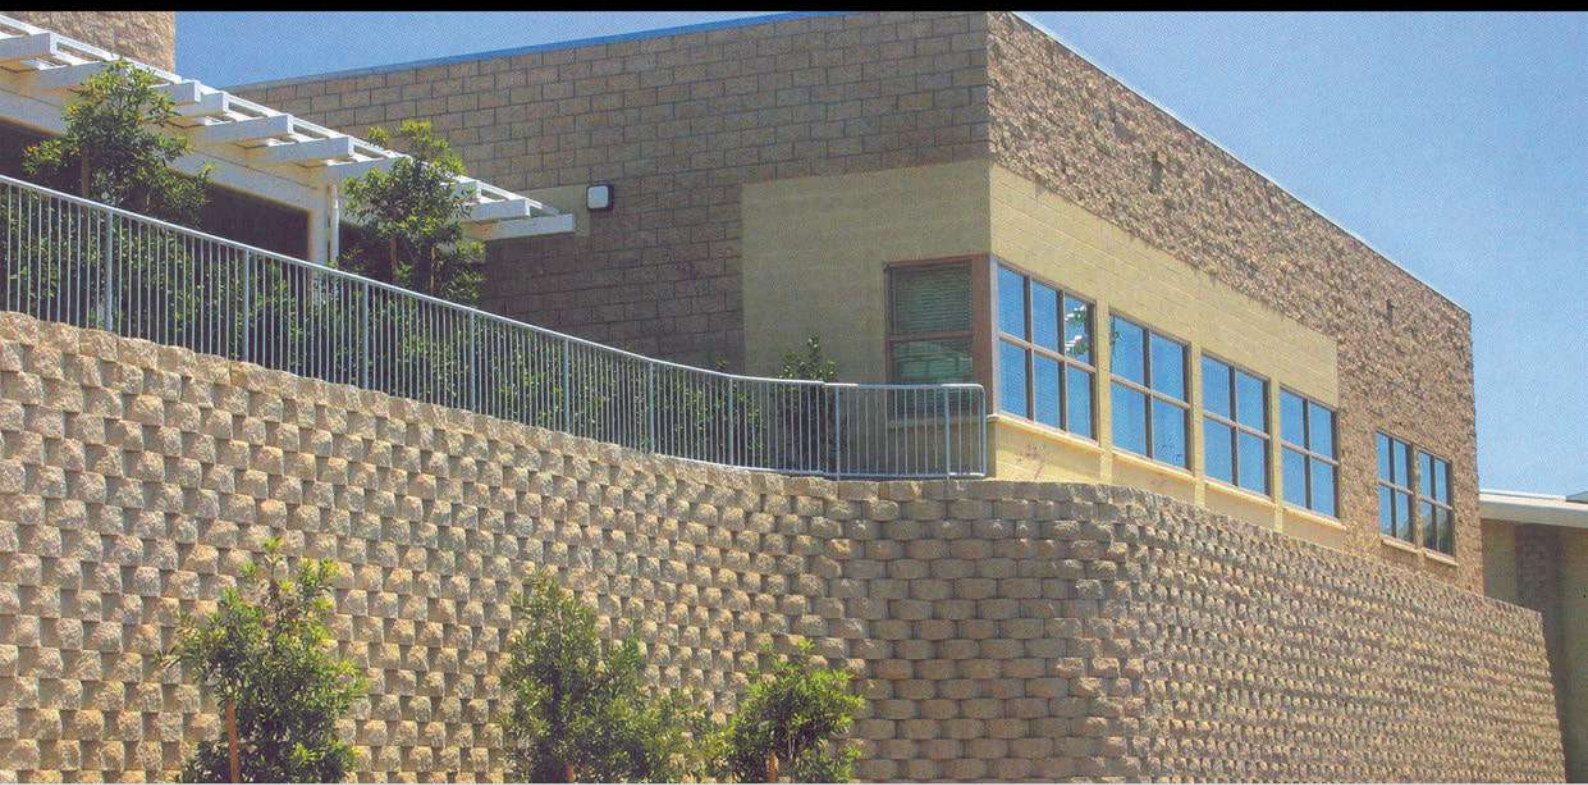

DESCRIPTION

Keystone is a US patterned segmental retaining wall system that is manufactured marketed, and serviced by **Keystone** Retaining Wall System Inc, and its network of over 125 licensed manufacturers / representatives worldwide. **envicrete** is the licensed manufacturer of **Keystone** Retaining Wall products in Pakistan.


Keystone is an extremely versatile retaining wall system. Whether your requirement is for Bridge Ramps, high “Zero Batter” retaining walls with heavy loads on top or small residential landscaping, it can provide the most economical solutions with extremely pleasant architectural results.

Product	Sizes (mm)	Quantity Per Pallet
Keystone	450mm(l) x 200mm(h) x 305mm(t)	32 PCS

AVAILABLE COLOURS

Varying shades of Brindle, Brown, Charcoal, Grey, Mud, Red, Terracotta, & Yellow.

DIMENSIONS AND SPECIFICATIONS

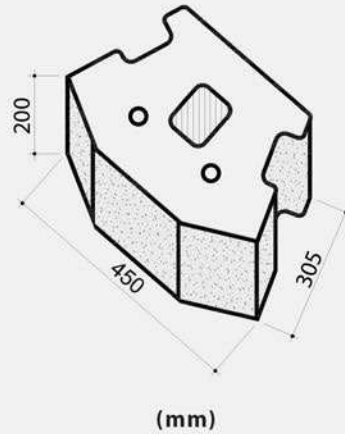

FEATURES

Durable components
(90 years designed life)

Design flexibility
curves, corners, unique geometries

Cost effective results
competitive to all MSE structures

High aesthetic appeal
options of colours, textures, patterns

Ease of construction
quick, easy no cranes / Heavy Machinery
required

BASIC APPLICATIONS

Retaining Walls

Embankments, Slopes

Bridge Ramps

Terraced Landscape

Flower beds and landscaping etc

ADDITIONAL APPLICATIONS

For making steps

Elevations

All products are also available in
Beach Grade recipes.






Material Datasheet

Solid LIGHTWEIGHT LiteCrete® Block

STANDARD FINISH

With LiteCrete® Solid Block range of Dense and Lightweight aggregate Blocks by **envicrete**, you are assured to find the building solution you need. Our blocks can be used with confidence in a wide variety of internal and external applications. Our quality assures that LiteCrete® Block units are of consistent and superior quality to meet the requirements of BS EN771-3 1981 Part 1.

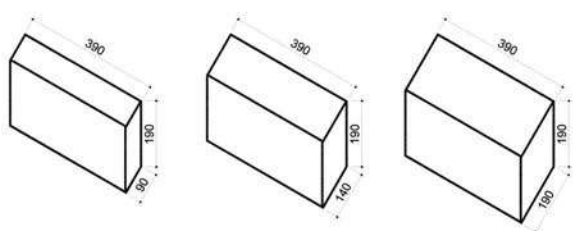

SIZE AVAILABLE SOLID BLOCK (IN MM)

Thickness	Length	Height	Weight (kg)
90	390	190	7.83
140	390	190	12.13
190	390	190	16.6

*These figures are a national average and variations may occur geographically, please contact your nearest Sale Office for more precise block weight.

PRODUCT SPECIFICATIONS

LiteCrete® Block TO BS EN771-3 1981 Part 1

'Aggregate Concrete Masonry Units Category 1 (dense and light-weight aggregates)'

CATEGORY:

AGGREGATE CONCRETE
MASONRY UNIT

DIMENSIONAL TOLERANCES:

±3.5mm

COMPRESSIVE STRENGTH:

700-800 PSI

REACTION TO FIRE:

Class A1

WATER ABSORPTION:

18-20 lbs/cft

WATER VAPOUR PERMEABILITY:

NA

DRY DENSITY:

1060 kg/m³

THERMAL CONDUCTIVITY:

0.285 W/mk


FREEZE-THAW:

NA



FEATURES AND BENEFITS

- Cost Saving
- 50% Lighter than Ordinary Blocks
- Reduction in Dead Load of Structure
- Designed to meet the requirements of the Building Regulations
- Demonstrates a high level of performance in loadbearing and other structural applications
- Manufactured utilising lightweight aggregates for a lighter block
- Open textured finish provides an excellent medium for surface finishes and fixings

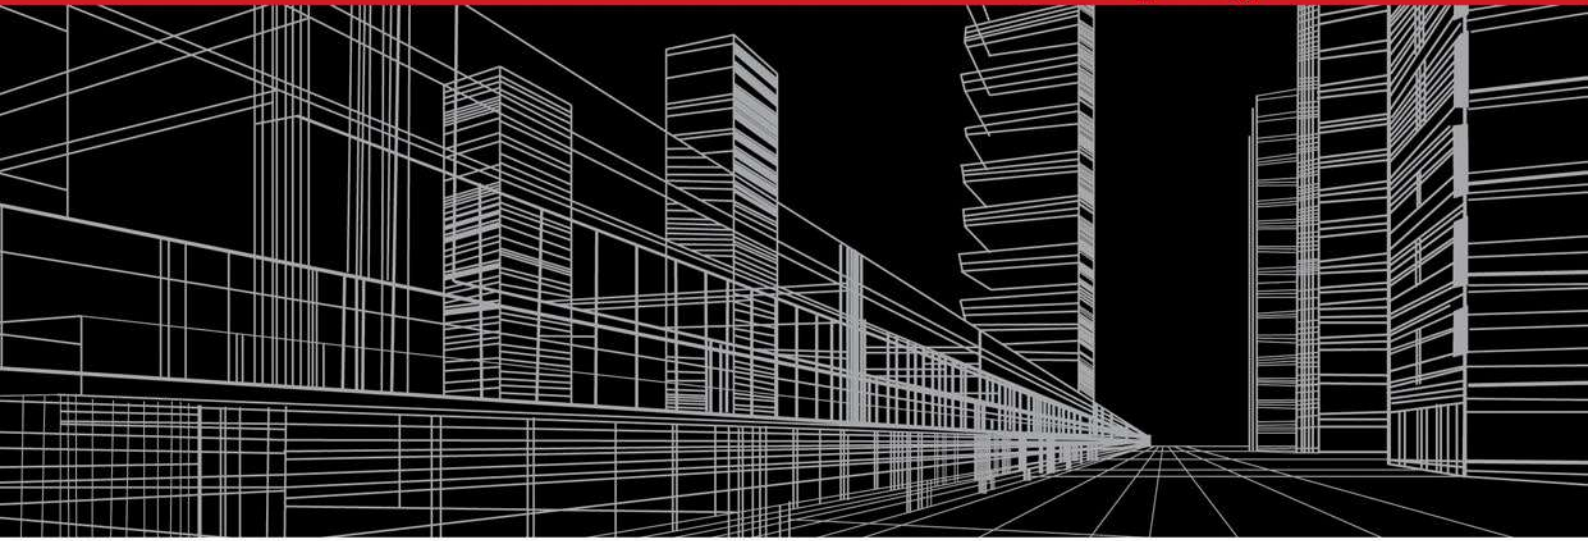


Material Datasheet

Hollow LIGHTWEIGHT LiteCrete® Block

STANDARD FINISH

With LiteCrete® Hollow Block range of Dense and Lightweight Aggregate Blocks by **envicrete**, you are assured to find the building solution you need. Our blocks can be used with confidence in a wide variety of internal and external applications. Our quality assures that LiteCrete® Block units are of consistent and superior quality to meet the requirements of BS EN771-3 1981 Part 1.

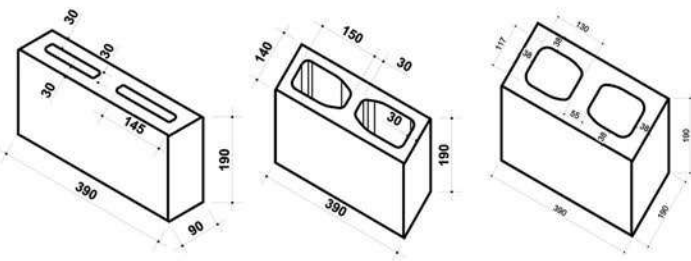

SIZE AVAILABLE HOLLOW BLOCK (IN MM)

Thickness	Length	Height	Weight (kg)
90	390	190	5.8
140	390	190	6.8
190	390	190	8.6

*These figures are a national average and variations may occur geographically, please contact your nearest Sale Office for more precise block weight.

PRODUCT SPECIFICATIONS

LiteCrete® Block TO BS EN771-3 1981 Part 1

'Aggregate Concrete Masonry Units Category 1 (dense and light-weight aggregates)'

CATEGORY:

AGGREGATE CONCRETE
MASONRY UNIT

DIMENSIONAL TOLERANCES:

±3.5mm

COMPRESSIVE STRENGTH:

700-800 PSI

REACTION TO FIRE:

Class A1

WATER ABSORPTION:

18-20 lbs/cft

WATER VAPOUR PERMEABILITY:

NA

DRY DENSITY:

1060 kg/m³

THERMAL CONDUCTIVITY:

0.285 W/mk

FREEZE-THAW:

NA



FEATURES AND BENEFITS

- Cost Saving
- 50% Lighter than Ordinary Blocks
- Reduction in Dead Load of Structure
- Designed to meet the requirements of the Building Regulations
- Demonstrates a high level of performance in loadbearing and other structural applications
- Manufactured utilising lightweight aggregates for a lighter block
- Open textured finish provides an excellent medium for surface finishes and fixings

PRECAST

envicrete Boundary Wall

Premium Quality Cast in Concrete



envicrete






ENVIROCK FACED PANELS

STANDARD LENGTHS

• 1800 ROCK FACED PANEL



To suit H-Post

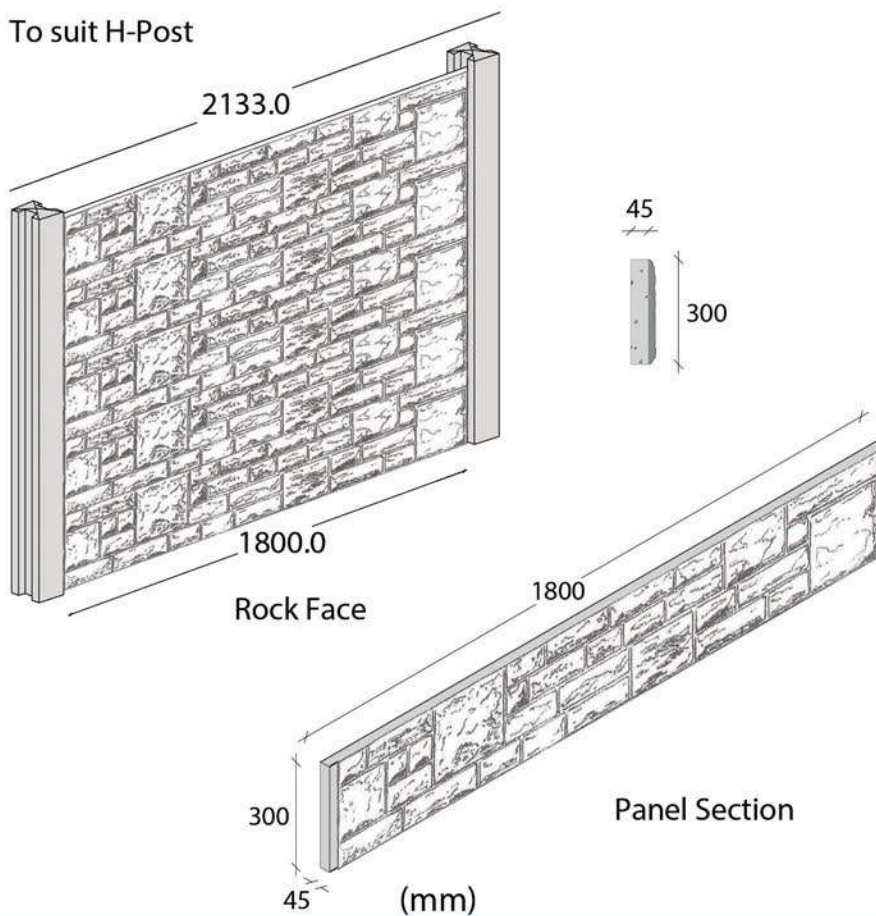

STANDARD LENGTHS

• 1800 PANEL

To suit H-Post

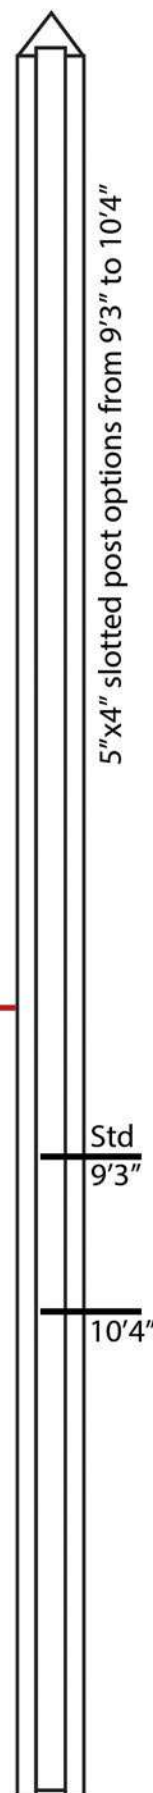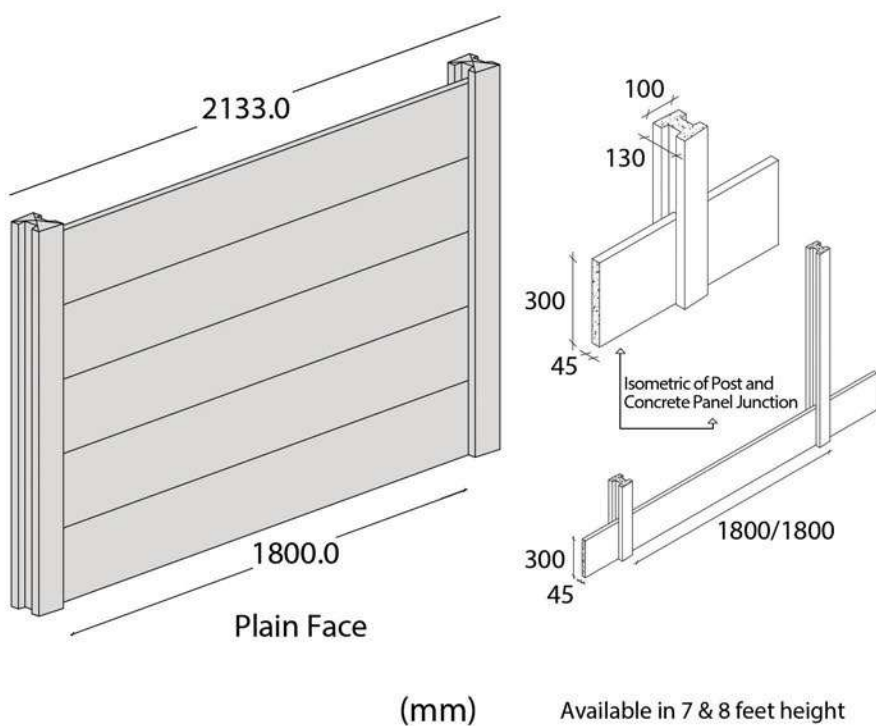

Available in 7 & 8 feet height

FAST-BUILT DRY CONSTRUCTION SYSTEM CEMENT BOARDS




Material Datasheet

envicrete Cement Board Cement Board

STANDARD FINISH

envicrete Cement Board are 100% free from Asbestos. **envicrete Cement Board** is specially designed for use in applications where impact resistance is required in a high humidity environment. It is a versatile, economic building board substitute of plywood, cement-bonded particle board, gypsum boards or magnesium boards. It is light weight, robust and moisture resistant.

Product Application: Internal Ceiling, External Ceiling partition walls, general external walls/ wet areas, raised floors and elevated floors.

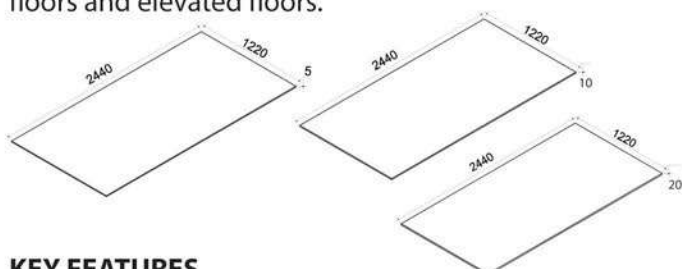

KEY FEATURES

	envicrete Board	Ordinary Board	Ply Board
Weather Resistance	★★★	★★	★
Water/Moisture Resistance	★★★	★★	★
Fire Resistance	★★★	★	★
Flexible	★★★	★★	★★
Sound Insulation	★★★	★★★	★★★
Workability	★★	★★	★★
Low Shrinkage	★★★	★★★	★★
Termite & Insect Proof	★★★	★	★★

PRODUCT SPECIFICATIONS

envicrete Cement Board

Cement Board 100% Asbestos Free.

CATEGORY:	CEMENT BOARD
DENSITY:	ASTM C1185 $1.300 \pm 50\text{kg/m}^2$
BENDING STRENGTH:	(Wet Condition) ASTM C1185 $>7\text{MPa}$
THERMAL CONDUCTIVITY:	ASTM C177 0.15W/MK
FIRE-RESISTANT GRADE:	Class A (BS 476 Part 22 32 180 min)
FREEZ/THAW RESISTANCE:	ASTM C1185 PASS
MOISTURE CONTENT:	ASTM C1185 $\leq 12\%$
SOUNDPROOF RATE:	ASTM E90-97 32 64db
THICKNESS:	5mm-20mm
STANDARD SPECIFICATION:	2440mmx1220mmx5mm 2440mmx1220mmx10mm 2440mmx1220mmx20mm





envicrete

the perfect way to build



Envicrete Display Centre Main

**CL 6/5, Abdullah Haroon Road, (Opp. Hotel Marriott), Karachi
UAN (021) 111 456 567, T (021) 3867 9031-6**

Lahore Office

**28-A, Block - XX, Phase III - C, Commercial Area, D.H.A Lahore
UAN (042) 111 456 567, T (042) 3810 2990-2**

Islamabad Office

**Rehman Plaza 75-East Blue Area G-7/3, Islamabad
Tel (051) 234 4226, (051) 234 4225
F (051) 234 4009**

**info@envicrete.com.pk
www.envicrete.com**



Follow envicrete on Instagram



Follow envicrete on Facebook